

indefinite sample storage infinite possibilities





Thermo Scientific Cryopreservation Equipment

Our cryopreservation sample preparation and storage solutions offer scientists outstanding temperature performance, low operating costs and integrated control features.

Extended Hold Times – Unlike mechanical systems, Thermo Scientific LN₂ storage solutions are designed to offer consistent temperatures even when electricity is lost. Samples remain protected much longer during power outages than alternative technologies. With cryo storage tanks, the need to locate backup storage and relocate samples is dramatically reduced.

Low Power Consumption – Because most Thermo Scientific cryogenic storage products reply on liquid nitrogen, they consume less power than a standard light bulb, providing significant energy savings.

Zero Greenhouse Gases – Because LN₂ storage depends on the cooling power of naturally sourced nitrogen gas, there are no halogenated hydrocarbon refrigerants used and no greenhouse gas concerns.







Sample Preparation

Controlled-rate freezers prepare your samples prior to cryogenic storage, ensuring maximum viability. Available in standard and IVF format.

Sample Storage Auto-Fill LN₂

Storage systems provide the ideal combination of quick sample access, liquid nitrogen storage reliability, microprocessor auto-fill technology and storage capacity from 6,318 to 38,500 1.2-2.0 mL vials. Large capacity, high-efficiency storage solutions offer outstanding sample protection and storage capacities up to 93,000 1.2-2.0 mL vials.

Sample Storage Manual-Fill LN₂ Dewars

BioCane, Locator and Locator Plus offer cost-effective storage flexibility and excellent portability with capacities from 180 to 3,600 1.2-2.0 mL vials for cost-effective flexibility and portability.

table of contents	PA	\GE
Sample Preparation	CryoMed [™] Controlled-Rate Freezers and Accessories	2
Sample Storage Auto-Fill LN ₂	CryoPlus [™] Storage Systems and Accessories CryoExtra [™] High-Efficiency Storage Systems and Accessories	8 20
Sample Storage Manual-Fill LN ₂ Dewars	BioCane™ Storage Systems and Accessories Locator™ and Locator Plus Storage Systems and Accessories	30 32
Sample and LN ₂ Transportation	Thermo Series Liquid Nitrogen Transfer Vessels Arctic Express Storage Systems Thermo-Flask Benchtop Liquid Nitrogen Containers LN ₂ Supply Tanks	36 38 40 41
General Accessories	CryoPreservation Accessories	42

dependable sample preparation

Thermo Scientific CryoMed Controlled-Rate Freezers

Our CryoMed freezers feature an integrated control system (consisting of freezing chamber, microprocessor control and printer – all in one bench top unit), allowing multiple freezing profiles to be tailored to specific protocols. Freezer functionality is enhanced by a MS Windows®-based controlled-rate freezing interface software (included) that connects to your PC and external printer.



Easy Programming and Monitoring


- The CryoMed controlled rate freezer can be operated directly from the unit's built-in microprocessor or remotely through the PC interface
- Includes a Java®-based PC software (as a standard feature) compatible with current Windows operating systems
- Backlit LCD provides at-a-glance operational status
- Allows at-a-glance from a distance to view sample and chamber tracking
- Chamber and sample temperatures and operation status are simultaneously displayed on a backlit LCD
- Chamber and sample temperatures are monitored by Type T thermocouples, which eliminate lag time and provide "real time" responsiveness
- Standard alarms enable open thermocouple, heater malfunction, high/low temp limit, temperature tracking, power failure, and completion of run
- Four-digit access code for added security
- Six standard preset profiles and ten user defined profiles for customer-created profiles are standard

LN₂ Freezing System Components

- Dual solenoid valves increase LN₂ injection volume for precise temperature control and accelerated freezing
- Specifically designed air handling system and patented liquid nitrogen injection ring work in tandem for precise temperature control and uniformity
- Over-temperature protection for heating provides a safe working environment
- IVF chambers are compliant with human sample standards and provide convenient top access for manual seeding of samples

Construction

- Type 304 stainless steel with exterior powder-coat finish for excellent durability
- Foamed in-place polyurethane insulation and Teflon[®] heat break minimizes cabinet condensation
- Bulb-style gaskets ensure tight door seal

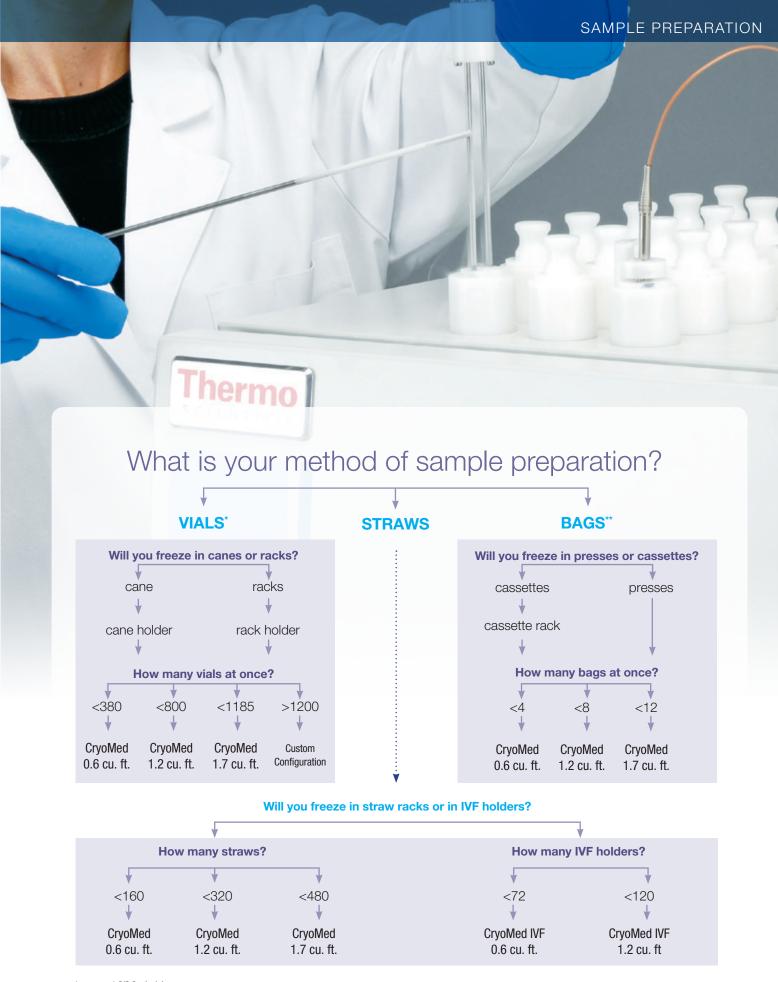

^{*}assumes 1.2/2.0 mL vials **assumes 250 mL bag

> Thermo Scientific CryoMed Controlled Rate Freezers

Model No.	Electrical	Plug Type	Chamber Volume	Access Type	Temp. Range	Exterior Dimensions (wxdxh)	Interior Dimensions (wxdxh)	Shipping Weight	Regulatory Listings	LN ₂ and Utility connection
7450	120v/60 Hz	NEMA 5-15P				0.1 - 0.1 0 00 11	7 40 404			
7451	220v/50 Hz	CEE 7/7	0.6 cu. ft. / 17L			31.7 x 21.2 x 20.4 in. 80.5 x 53.8 x 51.8 cm	7 x 12 x 13 in. 17.8 x 30.5 x 33 cm	200 lbs. / 90.7 kg		
7472	100v/60 Hz	NEMA 5-15P				00.0 x 00.0 x 01.0 0m	17.0 x 00.0 x 00 0111	00.7 Ng		
7452	120v/60 Hz	NEMA 5-15P]						
7453	220v/50 Hz	CEE 7/7	1.2 cu. ft. / 34L	Front Loading		13 x 12 x 13 in. 33 x 30.5 x 33 cm	215 lbs. / 97.5 kg	cULus and CE	All models	
7473	100v/60 Hz	NEMA 5-15P		Luauiiig		30.0 7 00.0 7 01.0 0111	30 X 00.3 X 00 0111	37.3 Ng	and of	require 22 psi low pressure supply tank and are supplied with (1) 0.5 in. 45° flare
7454	120v/60 Hz	NEMA 5-15P								
7455	220v/50 Hz	CEE 7/7	1.7 cu. ft. / 48.1L		50° to -180°C		43.7 x 21.2 x 20.4 in 48.3 x 30.5 x 33 cm	235 lbs. / 106.6 kg		
7474	100v/60 Hz	NEMA 5-15P			-100 0			100.0 Kg		
7456	120v/60 Hz	NEMA 5-15P								stainless steel
7457	220v/50 Hz	CEE 7/7	0.6 cu. ft. / 17L	Front		31.7 x 21.2 x 20.4 in. 80.5 x 57.2 x 51.8 cm	7 x 12 x 13 in. 17.8 x 30.5 x 33 cm	200 lbs. / 90.7 kg	510K,	flexible transfer hose
7475	100v/60 Hz	NEMA 5-15P		and Top		00.0 x 07.2 x 01.0 011	17.0 x 30.3 x 33 611	50.7 Ng		
7458	120v/60 Hz	NEMA 5-15P		Loading					CFDA, cULus and CE	
7459	220v/50 Hz	CEE 7/7	1.2 cu. ft. / 34L	(IVF)			13 x 12 x 13 in 33 x 30.5 x 33 cm	215 lbs. / 97.5 kg	uild OL	
7476	100v/60v	NEMA 5-15P	1		95.8 x 57.2 x 51.8 cm		33 X 30.3 X 33 GIII	31.3 kg		

> CryoMed	Freezing Ra	acks and Hold	ders	CryoMed 0.6 cu. ft.	CryoMed 1.2 cu. ft.	CryoMed 1.7 cu. ft.	CryoMed - IVF 0.6 cu. ft.	CryoMed - IVF 1.2 cu. ft.
Model No. & Desc	eription	Dimensions H x W x D in. (cm)	Storage					
III	4000294		Racks per chamber	4	8	12	4*	8*
////	Straw rack for .25/.5 mL straws	11.3 x 3 x 5.25 (28.7 x 7.6 x 13.3)	Straws per rack	40	40	40	40	40
44-	- holds 40 straws	(Total # straws per chamber	160	320	480	160*	320*
Concessor	4000303		Racks per chamber	N/A	1	1 large & 1 small	N/A	1*
		11 x 12 x 12	Canes per rack	N/A	162	162 & 77	N/A	162*
	Cane freezing rack - large	(28 x 30.5 x 30.5)	Vials (2 mL) per cane	N/A	5	5	N/A	5*
50000000 ·			Total # vials per chamber	N/A	810	1,195	N/A	810*
(000000000	4000700		Racks per chamber	1	N/A	1 large & 1 small	1*	N/A
	Cane freezing rack - small	11 x 6 x 12 (28 x 15.2 x 30.5)	Canes per rack	77	N/A	162 & 77	77*	N/A
7			Vials (2 mL) per cane	5	N/A	5	5*	N/A
			Total # vials per chamber	385	N/A	1,195	385*	N/A
	4000701		Racks per chamber	5	N/A	5 large & 5 small	5*	N/A
***************************************	1.2/2 mL freezing	1.1 x 6 x 12 (2.8 x 15.2 x 30.5)	Vials per rack	76	N/A	161 & 76	76*	N/A
	rack - small	,	Total # vials per chamber	380	N/A	1,185	380*	N/A
A	4000702		Rack holders per chamber	1	N/A	1 large & 1 small	1*	N/A
	Small rack holder for 4000701	9.8 x 6.2 x 12.4 (24.9 x 15.7 x 31.5)	Racks per rack holder	5	N/A	5 & 5	5*	N/A N/A
	racks	,	Total # racks per chamber	5	N/A	10	5*	N/A
	4000703		Racks per chamber	N/A	5	5 large & 5 small	N/A	5*
200000000	1.2/2 mL freezing	1.1 x 12 x 12 (2.8 x 30.5 x 30.5)	Vials per rack	N/A	161	161 & 76	N/A	161*
	rack - large		Total # vials per chamber	N/A	805	1,185	N/A	805*

^{*}These accessories can only be used when top loading cane vial and straw holders are not in use

> CryoMed	CryoMed Freezing Racks and Holders Dimensions		ers	CryoMed 0.6 cu. ft.	CryoMed 1.2 cu. ft.	CryoMed 1.7 cu. ft.	CryoMed - IVF 0.6 cu. ft.	CryoMed - IVF 1.2 cu. ft.
Model No. & Des	cription	Dimensions H x W x D in. (cm)	Storage			-		
B3555555	4000704		Rack holders per chamber	N/A	1	1 large & 1 small	N/A	1*
	Large rack holder for	9.8 x 12.2 x 12.4 (24.9 x 31 x 31.5)	Racks per rack holder	N/A	5	5 & 5	N/A	5*
	4000701 racks		Total # racks per chamber	N/A	5	10	N/A	5*
	4000705		Racks per chamber	3	N/A	3 large & 3 small	3*	N/A
	4 or 5 mL freezing rack	2.6 x 6 x 12 (6.6 x 15.2 x 30.5)	Vials per rack	76	N/A	161 & 76	76*	N/A
	- small		Total # vials per chamber	228	N/A	711	228*	N/A
	4000706		Rack holders per chamber	1	N/A	1 large & 1 small	1*	N/A
A	Small rack holder for	8.1 x 6.2 x 12.4 (20.6 x 15.7 x 31.5)	Racks per rack holder	3	N/A	3 & 3	3*	N/A N/A
	4000705 racks		Total # racks per chamber	3	N/A	6	3*	N/A
	4000707		Racks per chamber	N/A	3	3 large & 3 small	N/A	3*
	4 or 5 mL	8.1 x 12.2 x 12.4 (20.6 x 31 x 31.5)	Vials per rack	N/A	161	161 & 76	N/A	161*
	freezing rack - large		Total # vials per chamber	N/A	483	711	N/A	483*
·///\	4000708		Rack holders per chamber	N/A	1	1 large & 1 small	N/A	1*
	Large rack holder for	8.1 x 12.2 x 12.4 (20.6 x 31 x 31.5)	Racks per rack holder	N/A	3	3 & 3	N/A	3*
	4000707 racks		Total # racks per chamber	N/A	5	6	N/A	3*
	4000310		Rack holders per chamber	1	2	3	1*	2*
THE STREET	Two level skin rack - holds skin	10.5 x 6.2 x 12.6 (26.7 x 15.7 x 32)	Skin packets per rack	48	48	48	48	48
THE STATE OF STATE O	packets measuring 5 x 7 in.		Total # skin packets per chamber	48	96	144	48*	96*
	4000312		Rack holders per chamber	2	4	6	2*	4*
	One level skin rack - holds skin	5.2 x 6.2 x 12.6 (13.2 x 15.7 x 32)	Skin packets per rack	24	24	24	24	24
	packets measuring 5 x 7 in.	(1000)	Total # skin packets per chamber	48	96	144	48*	96*
A A	4000340		Rack holders per chamber	3	6	9	3*	6*
1	Cord blood freezing rack for	11 x 4 x 5 (28 x 10.2 x 12.7)	Canisters per rack	10	10	10	10	10
	50 mL canisters (4000610)		Total # canisters per chamber	30	60	90	30*	60*
	4000340		Rack holders per chamber	3	6	9	3*	6*
	Cord blood freezing rack for	11 x 4 x 5 (28 x 10.2 x 12.7)	Canisters per rack	10	10	10	10	10
	25 mL canisters (1950381)		Total # canisters per chamber	30	60	90	30*	60*
E	185089		Rack holders per chamber	N/A	2	2	N/A	2*
	Adjustable freezing rack for	11.6 x 5.5 to 7.5 x 8.2 (29.5 x 14 to 19 x 20.8)	Canisters per rack	N/A	10	10	N/A	10*
	canisters		Total # canisters per chamber	N/A	20	20	N/A	20*

> CryoMed	Freezing P	resses		CryoMed 0.6 cu. ft.	CryoMed 1.2 cu. ft.	CryoMed 1.7 cu. ft.	CryoMed - IVF 0.6 cu. ft.	CryoMed - IVF 1.2 cu. ft.
Model No. & Desc	ription	Dimensions H x W x D in. (cm)	Storage					
Ø Ø	4000314		Presses per chamber	4	8	12	4*	8*
	Bag press for	5.9 x 9	Bags per rack	2	2	2	2	2
	250 mL bag (Fenwal 4R5461 or equivalent)	(15 x 22.9)	Total # - bags per chamber	4	16	24	4*	16*
	4000316		Presses per chamber	N/A	4	8	N/A	4*
φ φ	Bag press for 200 mL bag (Gambro DF-200 or equivalent)	8 x 8.5	Bags per rack	N/A	2	2	N/A	2*
9, 9,		(20.3 x 21.6)	Total # - bags per chamber	N/A	8	16	N/A	8*
Q Q	4000317		Presses per chamber	N/A	4	8	N/A	4*
2 2	Bag press for Delmed 2030-2	8.8 x 12 (22.4 x 30.5)	Bags per rack	N/A	4	4	N/A	4*
			Total # - bags per chamber	N/A	16	32	N/A	16*
	4000318		Presses per chamber	N/A	4	8	N/A	4*
9	Bag press for	9 x 12	Bags per rack	N/A	4	4	N/A	4*
9.	250 mL bag (Fenwal 4R5461 or equivalent)	(22.9 x 30.5)	Total # - bags per chamber	N/A	16	32	N/A	16*
	4000320		Presses per chamber	N/A	4	8	N/A	4*
9	Bag press for	9 x 12	Bags per rack	N/A	4	4	N/A	4*
9	200 mL bag (Gambro DF-200 or equivalent)	(22.9 x 30.5)	Total # - bags per chamber	N/A	16	32	N/A	16*
	4000321		Presses per chamber	N/A	4	8	N/A	4*
9	Bag press for	8 x 12	Bags per rack	N/A	2	2	N/A	2*
9	700 mL bag (Gambro DF-700 or equivalent)	(20.3 x 30.5)	Total # - bags per chamber	N/A	8	16	N/A	8*
	4000555		Presses per chamber	4	8	12	4*	8*
Tr	Bag press for	6 x 10.3	Bags per rack	2	2	2	2	2
9	500 mL bag (Fenwal 4R5462 or equivalent)	(15.2 x 26.2)	Total # - bags per chamber	4	16	24	4*	16*

 $^{{}^*\}mathit{These}\ \mathit{accessories}\ \mathit{can}\ \mathit{only}\ \mathit{be}\ \mathit{used}\ \mathit{when}\ \mathit{top}\ \mathit{loading}\ \mathit{cane},\ \mathit{vial},\ \mathit{and}\ \mathit{straw}\ \mathit{holders}\ \mathit{are}\ \mathit{not}\ \mathit{in}\ \mathit{use}.$

-	> CryoMed Holders and Plugs for Top Loading Chambers		CryoMed 0.6 cu. ft.	CryoMed 1.2 cu. ft.	CryoMed 1.7 cu. ft.	CryoMed - IVF 0.6 cu. ft.	CryoMed - IVF 1.2 cu. ft.
Model No. & Des	scription	Storage					
	4000710	Holders per chamber	N/A	N/A	N/A	18	30
	.25/.5 mL straw holder	Straws per holder	N/A	N/A	N/A	4	4
		Total # - straws per chamber	N/A	N/A	N/A	72	120
П	4000711	Holders per chamber	N/A	N/A	N/A	18	30
I	1.2/2 mL vial holder	Vials per holder	N/A	N/A	N/A	1	1
1/		Total # - vials per chamber	N/A	N/A	N/A	18	30
	180254	Holders per chamber	N/A	N/A	N/A	18	30
	Cane holder	Canes per holder	N/A	N/A	N/A	1	1
	Carle Holder	Total # - canes per chamber	N/A	N/A	N/A	18	30
4	180255						
	Sleeve plug	Plugs per chamber	N/A	N/A	N/A	18	30

> CryoMed	Sample Sensors	CryoMed 0.6 cu. ft.	CryoMed 1.2 cu. ft.	CryoMed 1.7 cu. ft.	CryoMed - IVF 0.6 cu. ft.	CryoMed - IVF 1.2 cu. ft.
Model No. & Des	cription					
	Thermocouple sensor for 1.2/2 mL vials		4000385		4000	385*
	Thermocouple sensor for 4/5 mL vials		4000386		4000	386*
	Thermocouple sensor ribbon type for bags		4000393		4000	393*
7	Thermocouple sensor .02 sheath for straws		N/A		400	0402
4000393	Thermocouple sensor .062 sheath for vials		N/A		400	0403

^{*}These accessories can only be used when top loading cane, vial, and straw holders are not in use.

> CryoMed Canisters for Freezing Racks

Model No. & Desc	ription		Dimensions H x W x D in. (cm)
- 1	1950831	Swing arm canister for 25 mL bag	3.6 x 3.9 x 0.4 (9.14 x 9.4 x 1)
	4000610 (Fenwal 4R9951 or equivalent)	Swing arm canister for 50 mL bag	3.7 x 6.3 x 0.5 (9.4 x 16 x 1.3)
	4000356 (Gambro DF-200 or equivalent)	Swing arm canister for 200 mL bag	6.4 x 7.8 x 0.8 (16.3 x 19.1 x 2)
1950831	4000357 (Gambro DF-700 or equivalent)	Swing arm canister for 700 mL bag	6.5 x 12.1 x 0.8 (16.5 x 30.7 x 2)
	4000335 (Fenwal 4R5461 or equivalent)	Sliding canister for 250 mL bag	5.5 x 7.6 x 0.4 (14 x 19.3 x 1)
0	4000336 (Fenwal 4R5462 or equivalent)	Sliding canister for 500 mL bag	5.6 x 9.2 x 0.4 (14.2 x 23.4 x 1)
4000333	4000332 (Gambro DF-200 or equivalent)	Sliding canister for 200 mL bag	6.4 x 7.8 x 0.8 (16.3 x 19.1 x 2)
400000	4000333 (Gambro DF-700 or equivalent)	Sliding canister for 700 mL bag	6.5 x 11.8 x 0.8 (16.5 x 30 x 2)

> Printer Paper

Model No. & Description

Thermal printer paper (5 rolls per pack)

4000566

reliable long-term storage solution

Thermo Scientific CryoPlus Sample Storage Systems

Thermo Scientific CryoPlus series provides the perfect combination of liquid nitrogen storage reliability and microprocessor technology. Storage capacities of up to 38,500 vials (2.0 mL) make the most of your laboratory storage space.



Storage System Features

- Top-mounted control panel allows easy access to the CryoPlus' microprocessor controller for programming
- All lids incorporate foamed-in-place, high density urethane insulation with dedicated vent (U.S. Patent 5,779,089). Two independent, flexible gaskets reduce the migration of moister into the chamber and reduce icing.
- 24 tricolor LEDs continuously display actual liquid nitrogen level and high-level/low-level setpoints
- Remote alarm contacts for in-house remote alarms or connection to a Sensaphone® Telephone Dialing System
- Counterbalanced UL 61010 third addition compliant lid with 100% clearance allows each entry into the storage area for retrieval of samples, while minimizing sample exposure time and maintaining a safe work environment.
- · Heavy-duty casters are provided standard
- Incorporates a temperature sleeve as a standard feature, which
 provides colder temperatures at the top and more efficient operation
 in vapor phase
- Storage tanks are vacuum insulated with stainless steel interior
- Exterior cabinet is constructed of 18-gauge, cold roll steel with powder-coat paint for durability and a high quality uniform finish.
 Salt spray tests exceed 1,000 hours per ASTM Standard 117B-85
- All models come standard with LN₂ transfer hose

For maximum product security, CryoPlus incorporates three different solutions

- A convenient front-mounted cabinet key lock for sample security
- A keyed lock on the microprocessor for temperature and alarm set-point security
- A rear-mounted recessed power switch to prevent accidental power shut off


A complete sample storage solution offering for vapor or liquid phase

- Square and vertical racks for vial storage
- Frames and canisters for bag storage
- Specialty racks for cane storage
- Gas by-pass assembly delivers warm nitrogen to atmosphere until
 the control probe reaches set temperature. The by-pass valve closes
 and the fill valve is energized, preventing the storage area from being
 subjected to warm nitrogen gas. This is also required if the CryoPlus
 is connected to a manifold system to prevent LN₂ source alarms.



> Thermo Scientific CryoPlus Sample Storage Systems

Model	Model No.	LN ₂ Capacity (liters)	Electrical	Plug Type	Inner Tank Diameter	Exterior Dimensions	Shipping Weight	Regulatory Listings	LN ₂ and Utility Connection										
CryoPlus 1	7400	90	115v/60hz	NEMA 5-15P	16 in./	21.5 x 41 x 26 in.	260 lbs/												
GI YUFIUS I	7401	90	208-230v/50hz	CEE 7/7	40.6 cm 54.6 x 104.1 x 66 cm		40.6 cm 54.6 x 104.1 x 66 cm		117.9kg		All models require 22 psi low								
Crus Dius 2	7402	200	115v/60hz	NEMA 5-15P	24 in./	28.5 x 41 x 34 in	480 lbs/		pressure supply										
CryoPlus 2	7403	200	208-230v/50hz	CEE 7/7	61 cm	72.4 x 104.1 x 86.4 cm	217.7 kg	CFDA,	tank and are										
Crus Divo 2	7404	340	115v/60hz	NEMA 5-15P	31 in./	34.5 x 41 x 41.5 in	550 lbs/	cULus and CE	supplied with (1) 0.5 in. 45° flare										
CryoPlus 3	7405	340	208-230v/50hz	CEE 7/7	69.9 cm 87.6 x 104.1 x 105.4 cm		249 kg		stainless steel										
Crus Dius 4	7406	EEO	115v/60hz	NEMA 5-15P	39.5 in. /	43.5 x 47 x 50 in	1070 lbs/		flexible transfer hose										
CryoPlus 4	7407	552	208-230v/50hz	CEE 7/7	69.9 cm 110,5 x 119.4 x 127 cm		69.9 cm 110,5 x 119.4 x 127 cm		69.9 cm 110,5 x 119.4 x 127 cm								484.3 kg		11000









> CryoPlus Rack Selection Guide

Dimensions

Model No. & D	escription	Dimensions H x W x D in. (cm)	Storage				
Square Rack	ks for Liquid Phase Stora	ge					
	4000006		Racks per vessel	4	10	17	29
		27.4 x 5.5 x 6.3	Boxes per rack	13	13	13	13
	Rack includes cardboard boxes and cardboard dividers	(69.6 x 14 x 16)	Vials per box	100	100	100	100
	for 1.5/2 mL vials		Vials per vessel	5,200	13,000	22,100	37,700
	4000007		Racks per vessel	4	10	17	29
		27.4 x 5.5 x 6.3	Boxes per rack	13	13	13	13
	Rack includes stainless steel boxes and cardboard dividers	(69.6 x 14 x 16)	Vials per box	100	100	100	100
	for 1.5/2 mL vials		Vials per vessel	5,200	13,000	22,100	37,700
	4000042		Racks per vessel	4	10	17	29
		26 x 5.5 x 6.3	Boxes per rack	12	12	12	12
	Rack includes cardboard boxes and cardboard dividers	(66 x 14 x 16)	Vials per box	100	100	100	100
# =	for 1.5/2 mL vials		Vials per vessel	4,800	12,000	20,400	34,800
	4000008		Racks per vessel	4	10	17	29
		25.4 x 5.5 x 6.3 (64.5 x 14 x 16)	Boxes per rack	8	8	8	8
	Rack includes cardboard boxes and cardboard dividers		Vials per box	100	100	100	100
	for 4 mL vials		Vials per vessel	3,200	8,000	13,600	23,200
•	4000009		Racks per vessel	4	10	17	29
	Rack includes stainless steel	25.4 x 5.5 x 6.3	Boxes per rack	8	8	8	8
	boxes and cardboard dividers	(64.5 x 14 x 16)	Vials per box	100	100	100	100
1	for 4 mL vials		Vials per vessel	3,200	8,000	13,600	23,200
4 = 1	4000010		Racks per vessel	4	10	17	29
	Rack includes cardboard	26.6 x 5.5 x 6.3	Boxes per rack	7	7	7	7
	boxes and cardboard dividers for 5 mL vials	(67.6 x 14 x 16)	Vials per box	100	100	100	100
	IUI O IIIL VIAIS		Vials per vessel	2,800	7,000	11,900	20,300

CryoPlus	Rack Selection		CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4	
Model No. & Des	cription for Vapor Phase Storag	Dimensions H x W x D in. (cm)	Storage				
Square nacks	4000001	U	Racks per vessel	4	10	17	29
#=	400001	_	Boxes per rack	11	11	11	11
	Rack includes cardboard boxes and cardboard dividers	23.9 x 5.5 x 6.3 (60.7 x 14 x 16)	Vials per box	100	100	100	100
	for 1.5/2 mL vials		Vials per vessel	4,400	11,000	18,700	31,900
	400002		Racks per vessel	4	10	17	29
	400002		Boxes per rack	11	11	11	11
	Rack includes stainless steel	23.9 x 5.5 x 6.3 (60.7 x 14 x 16)	Vials per box	100	100	100	100
	boxes for 1.5/2 mL vials		Vials per vessel	4,400	11,000	18,700	31,900
	400003		Racks per vessel	4,400	10	17	29
	4000003		·		7	7	7
	Rack includes cardboard	22.3 x 5.5 x 6.3 (56.6 x 14 x 16)	Boxes per rack	7			100
	boxes and cardboard dividers for 4 mL vials		Vials per box	100	100	100	
			Vials per vessel	2,800	7,000	11,900	20,300
•	4000004	22.3 x 5.5 x 6.3 (56.6 x 14 x 16)	Racks per vessel	4	10	17	29
3:1:1:	Rack includes stainless steel		Boxes per rack	7	7	7	7
	boxes and cardboard dividers for 4 mL vials		Vials per box	100	100	100	100
			Vials per vessel	2,800	7,000	11,900	20,300
	4000005		Racks per vessel	4	10	17	29
F	Deale in alcohol a conflict and	22.8 x 5.5 x 6.3	Boxes per rack	6	6	6	6
F	Rack includes cardboard boxes and cardboard dividers	(57.9 x 14 x 16)	Vials per box	100	100	100	100
	for 5 mL vials		Vials per vessel	2,400	6,000	10,200	17,400
pecialty Rac	ks						
111-1-1	4000379		Racks per vessel	4	10	17	29
		00.0 5.5 0.0	Canisters per rack	8	8	8	8
	SUC-1 rack for cane storage (includes canisters	23.9 x 5.5 x 6.3 (60.7 x 14 x 16)	Canes per canister	25	25	25	25
	#4000176)		Canes per vessel	800	2,000	3,400	5,800
latform Rise	rs Required for Racks in	Vapor Phase Sto	rage				
	3.5" riser for use with 400000	01, 4000002, and 40003	379 racks	4000060	4000060	4000063	4000066
	4" riser for use with 4000005	racks		4000056	4000062	4000065	4000068
	5" riser for use with 4000003	and 4000004 racks		4000061	4000061	4000064	4000067

^{*} Each canister will hold 25 canes without cryo sleeves or 16 canes with cryosleeves



> Arrowhead Racks for Liquid Phase Storage

CryoPlus 1

	Model No. & Description	Dimensions H x W x D in. (cm)	Storage	1
	4000044		Racks per vessel	6
		28.1 x 7.8 x 7.5	Boxes per rack	13
	Rack includes cardboard boxes and cardboard dividers for 1.5/2 mL vials	(71.4 x 19.8 x 19.1)	Vials per box	81
3			Vials per vessel	6,318
	4000112		Racks per vessel	6
		26 x 7.8 x 7.5	Boxes per rack	13
	Rack includes cardboard boxes and cardboard dividers for 1.5/2 mL vials	(66 x 19.8 x 19.1)	Vials per box	81
3			Vials per vessel	6,318
1	4000113		Racks per vessel	6
		26 x 7.8 x 7.5	Boxes per rack	12
	Rack includes stainless steel boxes and cardboard dividers for 1.5/2 mL vials	(66 x 19.8 x 19.1)	Vials per box	81
			Vials per vessel	5,832
	4000104		Racks per vessel	6
		25.4 x 7.8 x 7.5	Boxes per rack	8
	Rack includes cardboard boxes and cardboard dividers for 4 mL vials	(64.5x 19.8 x 19.1)	Vials per box	81
			Vials per vessel	3,888
10	4000105		Racks per vessel	6
		25.4 x 7.8 x 7.5	Boxes per rack	8
	Rack includes stainless steel boxes and cardboard dividers for 4 mL vials	(64.5x 19.8 x 19.1)	Vials per box	81
			Vials per vessel	3,888
7	4000043	water to the same of	Racks per vessel	6
		26.5 x 7.8 x 7.5	Boxes per rack	7
	Rack includes cardboard boxes and cardboard dividers for 5 mL vials	(67.3 x 19.8 x 19)	Vials per box	81
			Vials per vessel	3,402



> Arrowhead Racks for Vapor Phase Storage

CryoPlus 1

	Model No. & Description	Dimensions H x W x D in. (cm)	Storage	
F	4000110		Racks per vessel	6
		00.0 7.0 7.5	Boxes per rack	11
	Rack includes cardboard boxes and cardboard dividers	(60.5 x 19.8 x 19.1)	Vials per box	81
	for 1.5/2 mL vials		Vials per vessel	5,346
: 7	4000111	23.8 x 7.8 x 7.5 (60.5 x 19.8 x 19.1)	Racks per vessel	6
			Boxes per rack	11
	Rack includes stainless steel boxes and cardboard dividers for 1.5/2 mL vials		Vials per box	81
			Racks per vessel Boxes per rack Vials per box Vials per vessel Racks per vessel Boxes per rack	5,346
F	4000108		Racks per vessel	6
		21.6 x 7.8 x 7.5	Boxes per rack	10
	Rack includes cardboard boxes and cardboard dividers for 2 mL vials	(54.9 x 19.8 x 19.1)	Vials per box	81
3		inless steel boxes and cardboard dividers 23.8 x 7.8 x 7.5 (60.5 x 19.8 x 19.1) 21.6 x 7.8 x 7.5	Vials per vessel	4,860

> Platform Risers Required for Racks in Vapor Phase Storage

Description of riser and racks for intended use	CryoPlus 1
3.5 in. riser for use with 4000110 and 4000111 racks	4000060
5 in. riser for use with 4000108 racks	4000061

> Arrowhead Boxes and Dividers for Vapor Phase Storage

Model No.	Description
 Boxes	And the second s
4000193	Arrowhead cardboard box (with drain hole) includes 81-cell divider for use with 1.5/2 mL vials
4000194	Arrowhead stainless steel box (with drain hole) does not include 81-cell divider for use with 1.5/2 mL vials
4000195	Arrowhead cardboard box (with drain hole) includes 81-cell divider for use with 4/5 mL vials
4000195	Arrowhead stainless steel box (with drain hole) does not include 81-cell divider for use with 4 mL vials
Cell Dividers	
4000181	81-cell divider for use with all arrowhead boxes









> Vertical Racks for Liquid Phase Storage

CryoPlus 1

CryoPlus 2

CryoPlus 3

CryoPlus 4

Model No. & Description

H x W x D in. (cm) Storage

MIDUEL NO. & DES	Model No. & Description		Storage						
Vertical Rack	for Liquid Phase Storag	e							
	4000012		Racks per vessel	10	27	46	78		
	Dools includes condessed	27.6 x 2.3 x 5.7	Boxes per rack	5	5	5	5		
1	Rack includes cardboard boxes and cardboard dividers	(70.1 x 5.8 x 14.5)	Vials per box	100	100	100	100		
	for 1.5/2 mL vials		Vials per vessel	5,000	13,500	23,000	39,000		
Vertical Rack	Vertical Rack for Vapor Phase Storage								
īF7	4000011	22.2 x 2.3 x 5.7 (56.4 x 5.8 x 14.5)	Racks per vessel	10	27	46	78		
	Rack includes cardboard		Boxes per rack	4	4	4	4		
	boxes and cardboard dividers		Vials per box	100	100	100	100		
	for 1.5/2 mL vials		Vials per vessel	4,000	10,800	18	31,200		
Platform Rise	rs Required for Racks in	Vapor Phase Sto	rage						
	Description of riser and ra	acks for intended us	e						
	5 in. riser for use with 400001	5 in. riser for use with 4000011 racks			4000061	4000064	4000067		
							i e		

> Boxes and Dividers

	Model No.	Description
	Boxes	
	4000014	Cardboard box with 100-cell divider for use with 1.5/2 mL vials (does have drain hole)
	820010	Polycarbonate box with 100-cell divider for use with 1.5/2 mL vials with internal threaded caps (does have drain hole)
	820011	Polycarbonate box with 81-cell divider for use with 1.5/2 mL vials (does have drain hole)

> Frames and Canisters for Liquid Phase Storage

Model No. &	Description	Dimensions H x W x D in. (cm)	Storage	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4
B	4000670		Frames per vessel	34	90	154	256
F	Frame for 4000610 canister	27.4 x 0.6 x 4.6 (69.6 x 1.5 x 11.7)	Canisters per frame	7	7	7	7
3	Frame for 4000610 canister		Canisters per vessel	238	630	1,078	1,792
В	1900585		Frames per vessel	34	100	184	314
A	Frame for 1050021 conjeter	27.4 x 0.6 x 3.8 (69.6 x 1.5 x 9.7)	Canisters per frame	7	7	7	7
3	Frame for 1950831 canister		Canisters per vessel	238	700	1,288	2,198
H	4000371	23.7 x 0.6 x 6.5 (60.2 x 1.5 x 16.5)	Frames per vessel	28	64	112	174
	Frame for 4000335 canister		Canisters per frame	4	4	4	4
1			Canisters per vessel	112	256	448	696
П	4000372	23.8 x 0.7 x 8.2 (60.5 x 1.8 x 20.8)	Frames per vessel	22	50	82	152
H			Canisters per frame	4	4	4	4
d	Frame for 4000336 canister		Canisters per vessel	88	200	328	608
	4000368		Frames per vessel	19	40	68	116
-	Frame for 4000332 and	26.4 x 0.9 x 6.1 (67.1 x 2.3 x 15.5)	Canisters per frame	4	4	4	4
1	4000356 canisters	(5.11 / 2.0 / 10.0)	Canisters per vessel	76	160	272	464
	4000369		Frames per vessel	10	26	44	N/A
H	Frame for 4000333 and	26.4 x 1 x 10 (67.1 x 2.5 x 25.4)	Canisters per frame	4	4	4	N/A
1	4000357 canisters		Canisters per vessel	40	104	176	N/A

> Frames and Canisters for Vapor Phase Storage

Model No. & Des	cription	Dimensions H x W x D in. (cm)	Storage	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4
A	4000660		Frames per vessel	34	90	154	256
B	F f 4000040	23.5 x 0.6 x 4.6 (59.7 x 1.5 x 11.7)	Canisters per frame	6	6	6	6
B	Frame for 4000610 canister		Canisters per vessel	204	540	924	1,792
B	1900584		Frames per vessel	34	100	184	314
B	Frame for 1950831 canister	23.5 x 0.6 x 3.8 (59.7 x 1.5 x 9.7)	Canisters per frame	6	6	6	6
B			Canisters per vessel	204	600	1,104	1,884
п	4000371		Frames per vessel	28	64	112	174
3	France for 400000F consisten	23.7 x 0.6 x 6.5 (60.2 x 1.5 x 16.5)	Canisters per frame	4	4	4	4
	Frame for 4000335 canister		Canisters per vessel	112	256	448	696
П	4000372		Frames per vessel	22	50	82	152
B	Frame for 4000226 conjutor	23.8 x 0.7 x 8.2 (60.5 x 1.8 x 20.8)	Canisters per frame	4	4	4	4
	Frame for 4000336 canister	,	Canisters per vessel	88	200	328	608

> Platform Risers Required for Frames in Vapor Phase Storage

	Description of riser and frames for intended use	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4		
	3.5 in. riser for use with 4000371 and 4000372 frames	4000060	4000060	4000063	4000066		
	4 in. riser for use with 4000660 frames	4000056	4000062	4000065	4000068		
Platform divid	ers for the above frames						
	Description of platform divider and frames for intended use	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4		
	Platform divider for use with 4000660 and 4000670 frames	4000616	4000624	4000631	4000639		
	Platform divider for use with 4000371 frames	N/A	4000075	4000050	4000053		
-	Platform divider for use with 4000372 frames	N/A	4000076	4000051	4000054		
	Platform divider for use with 4000368 frames	N/A	4000078	4000047	4000052		
	Platform divider for use with 4000369 frames	N/A	4000079	4000048	N/A		
Canisters for t	he above frames						
-1	Model No. & Description	Dimensions H	I x W x D in. (cm)				
	1950831 Sliding canister for 25 mL bag	3.6 x 3.915 x .3	75 (9.14 x 9.94 x 0.	95)			
	4000610 Swing arm canister for 50 mL bag (Fenwal 4R9951 or equivalent)	3.7 x 6.3 x 0.5 (3.7 x 6.3 x 0.5 (9.4 x 16 x 1.3)				
	4000335 Sliding canister for 250 mL bag (Fenwal 4R5461 or equivalent)	5.5 x 7.6 x 0.4 (5.5 x 7.6 x 0.4 (14 x 19.3 x 1)				
	4000366 Sliding canister for 500 mL bag (Fenwal 4R5462 or equivalent)	5.6 x 9.2 x 0.4 (5.6 x 9.2 x 0.4 (14.2 x 23.4 x 1)				
	4000332 Sliding canister for 200 mL bag (Gambro DF-200 or equivalent)	6.4 x 7.8 x 0.8 (16.3 x 19.1 x 2)					
	4000356 Swing arm canister for 200 mL bag (Gambro DF-200 or equivalent)	6.4 x 7.8 x 0.8 (16.3 x 19.1 x 2)					
	4000333 Sliding canister for 700 mL bag (Gambro DF-700 or equivalent)	6.5 x 11.8 x 0.8	(16.5 x 30 x 2)				
	4000357 Swing arm canister for 700 mL bag (Gambro DF-700 or equivalent)	0.5 x 12.1 x 0.8 (16.5 x 30.7 x 2)					









Mini Square Racks for Liquid Phase Storage



Model No. & Description	Dimensions H x W x D in. (cm)	Storage	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4
4000260	26.2 x 3.3 x 3.4 (66.5 x 8.4 x 8.6)	Racks per vessel	11	30	55	92
Rack includes cardboard		Boxes per rack	12	12	12	12
boxes and cardboard		Vials per box	25	25	25	25
dividers for 1.5/2 mL vials		Vials per vessel	3,300	9,000	16,500	27,600


Mini Boxes for Liquid Phase Storage



	Model No.	Description
Boxes	189470	Mini cardboard box - 2.75 in. x 2.75 in. x 2 in. for use with 25-cell divider for use with 1.5/2 mL vials
Cell Dividers	189387	25-cell divider for use in the 189470 box

LN₂ Cryo Storage Selector Guide

VAPOR OR LIQUID PHASE STORAGE?

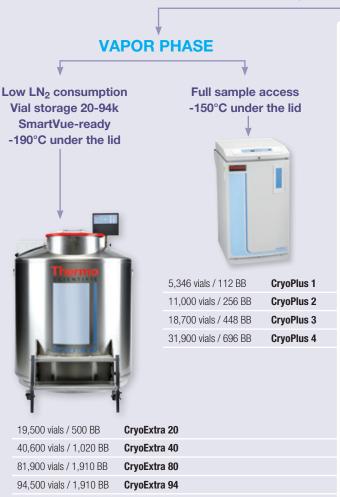

*Based on 2.0 mL vial **Based on 250mL blood bag

LIQUID PHASE Cryovials* **Blood Bags**** ≥ 6000 6,318 / 112 BB CryoPlus 1 13,000 / 256 BB CryoPlus 2 22,100 / 448 BB CryoPlus 3 CryoPlus 4 37,700 / 696 BB ≤ 6000 Cane or box storage? 4-6k Locator 6+ Cane 2-4k Locator 4+ or Straw ≤ 2k (100 cell box) Locator Jr+ ≤ 2k (25 cell box) Locator 8+ ≤ 2k vials/ 3360 straws BioCane 73 BioCane 47 ≤ 1.5k vials/ 2500 ≤ 700vials/ 1200 straws BioCane 34 ≤ 120 vials/ 300 straws BioCane 20









> Racks for Thermo Scientific™ Matrix 2D™ Tubes

Model No. & De	escription	Dimensions H x W x D in. (cm)	Storage	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4
Liquid Phase	:						
	1950836		Racks per vessel	7	16	30	51
	Rack for Matrix 2D plates measuring 1.082 in.	27 x 5.313 x 3.65 (68.6 x 13.5 x 9.3)	Plates per rack	18	18	18	18
	to 1.394 in. tall		Plates per vessel	126	288	900	918
	1950839		Racks Per vessel	7	16	30	51
	Rack for Matrix 2D plates measuring 1.55 in.	27.15 x 5.313 x 3.65 (69 x 13.5 x 9.3)	Plates per rack	12	12	12	12
111	to 2.15 in. tall		Plates per vessel	84	192	360	612
	1950840		Racks per vessel	7	16	30	51
	Rack for Matrix 2D plates	27.5 x 5.313 x 3.65 (69.9 x 13.5 x 9.3)	Plates per rack	11	11	11	11
	measuring 2.3 in. tall		Plates per vessel	77	176	330	561
3 10 10 10 10 10 10 10 10 10 10 10 10 10	1950841		Racks per vessel	7	16	30	51
	Rack for Matrix 2D plates measuring 3.78 in. tall	27.5 x 5.313 x 3.65 (69.9 x 13.5 x 9.3)	Plates per rack	7	7	7	7
1			Plates per vessel	49	112	210	357
Vapor Phase							
1	1950832		Racks per vessel	7	16	30	51
AMARIA	Rack for Matrix 2D plates	22.5 x 5.313 x 3.65 (57.2 x 13.5 x 9.3)	Plates per rack	15	15	15	15
	measuring 1.082 in. to 1.394 in. tall		Plates per vessel	105	240	450	765
3	1950833		Racks per vessel	7	16	30	51
	Rack for Matrix 2D plates	22.6 x 5.313 x 3.65 (57.4 x 13.5 x 9.3)	Plates per rack	10	10	10	10
	measuring 1.55 in. to 2.15 in. tall		Plates per vessel	70	160	300	510
3	1959834		Racks per vessel	7	16	30	51
THE REAL PROPERTY.	Rack for Matrix 2D plates	22.5 x 5.313 x 3.65 (57.2 x 13.5 x 9.3)	Plates per rack	9	9	9	9
	measuring 2.3 in. tall		Plates per vessel	63	144	270	459
1.	1950835		Racks per vessel	7	16	30	51
-	Rack for Matrix 2D plates	19.65 x 5.313 x 3.65 (49.9 x 13.5 x 9.3)	Plates per rack	5	5	5	5
	measuring 3.78 in. tall		Plates per vessel	35	80	150	255


Platform risers required for racks in vapor phase storage									
	Description of riser and racks for intended use	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4				
	5 in. riser for use with 1950832, 1950833, 1950834, and 1950835 racks	4000061	4000061	4000064	4000067				

> Boxes and Dividers


Model No.	Description
Boxes	
4000014	Cardboard box with 100-cell divider for use with 1.5/2 mL vials (does have drain hole)
4000015	Cardboard box with 100-cell divider for use with 4/5 mL vials (does have drain hole)
820010	Polycarbonate box with 100-cell divider for use with 1.5/2 mL vials with internal threaded caps (does have drain hole)
820011	Polycarbonate box with 81-cell divider for use with 1.5/2 mL vials (does have drain hole)
4000238	Stainless steel box for 1.5/2 mL vials (does not include 100-cell divider)
4000239	Stainless steel box for 4 mL vials (does not include 100-cell divider)
Cell Dividers	
4000013	100-cell divider for use in the 4000014, 4000015, 4000238, and 4000239 boxes

> Other Ac	cessories for CryoPlus	CryoPlus 1	CryoPlus 2	CryoPlus 3	CryoPlus 4		
Recorder Kit							
	Factory installed - 120 volt, 50/60 Hz with 6 in. diameter circular chart, 7-day temperature recorder, pen and chart drive (Specify - top, left and right side mount - right side is default if not specified)	201175					
	Factory installed - 220 volt, 50/60 Hz with 6 in. diameter circular chart, 7-day temperature recorder, pen and chart drive (Specify - top, left and right side mount - right side is default if not specified)			201280			
	Replacement Felt Tip Pen			245231			
	Replacement Circular Chart Paper			197064			
Hot Gas By-Pas	s Valve Assembly						
Blood	Factory installed – 120 volt, 50/60 Hz 195021						
	Field installed (QI) – 120 volt, 50/60 Hz	195700					
	Factory installed – 220 volt, 50/60 Hz			195023			
	Field installed (QI) – 220 volt, 50/60 Hz	195701					
Thermal Tempe	rature Sleeve						
	Factory installed	1950720	2950721	Si	andard		
	Customer installed/retrofit	1950706	1950707	1950708	1950709		
Thermal Data P	rinter						
A	120V, 60 Hz Printer with cable assembly and RS-232 connector kit		4	1000565			
	Thermal printer paper (5 rolls/package)		4	1000566			

Thermo Scientific CryoExtra 40 Temperature Uniformity

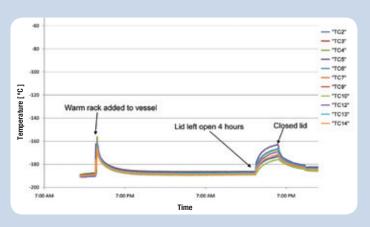

* Based on internal data. October, 2011. TC2-14 were placed on the top warmest rack.

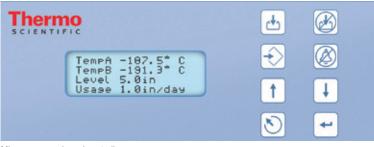

Microprocessor-based controller

Maximum Capacity

Designed to maximize sample capacity with minimum footprint, CryoExtra accepts both vertical and horizontal racks. Thermo Scientific cryogenic racking solutions are designed for the vessel's storage configuration, further maximizing capacity. Our 93,000 sample capacity model has the same footprint as our 80,600 sample capacity model, saving valuable floor space.

Uniform Temperatures

Minimal top to bottom temperature variation due to vacuum insulated stainless steel vessel.

Stable Lid Open Temperature

Innovative lid and neck design ensures stable temperature even during lid openings, conserving liquid nitrogen and maintaining temperature.

Advanced Temperature Monitoring Controller

Microprocessor controller monitors temperature using thermocouples accurate to +/- 1°C. Other features: useradjustable alarm setpoint with full alarm mute options; built-in remote alarm contacts and easy to read level indicator.





Interior trap door

Automated Fill and Level Monitoring

Four thermistors monitor both the fill and control $\rm LN_2$ levels to ensure proper levels. Self diagnostics ensure reliable sensor functioning. Monitor features: current temperature display, high temperature alarm, $\rm LN_2$ level and alarms, sensor fail alarm and filling status.

Hot Gas Bypass

Keeps samples safe from warm nitrogen gas during a fill cycle, improving sample security.

Convenient Work Space

A stainless platform near the vessel opening provides a flat surface for ergonomic rack placement and speeding sample recovery. All units feature integral, folding steps and interior trap door for sub-carousel access.

Thermo Scientific CryoExtra

> Selection Guide	CryoExtra 20	CryoExtra 40	CryoExtra 80	CryoExtra 94	
LN ₂ capacity (capacity under turntable)	463 liters (55 liters)	797 liters (133 liters)	1,745 liters (318 liters)	1,770 liters (296 liters)	
Maximum System Capacity					
Vial capacity (1.2-2 mL)	19,500	40,600	80,600	93,000	
Blood bag capacity (frames) 50 mL, Fenwal 4R9951	1,056 (132)	1,876 (268)	3,381 (483)	3,864 (483)	
Blood bag capacity (frames) 250 mL, Fenwal 4R9953	500 (100)	1,020 (204)	1,910 (382)	1,910 (382)	
Blood bag capacity (frames) 500 mL, Fenwal 4R9955	410 (82)	791 (158)	1,520 (304)	1,520 (304)	
Blood bag capacity (frames) 500 mL, Gambro DF-200	340 (68)	552 (138)	1,060 (265)	1,325 (265)	
Blood bag capacity (frames) 700 mL, Gambro DF-700	220 (44)	320 (80)	656 (164)	820 (164)	
Rack Configuration Requirements for Maximum Cap	oacity (Combination of Squa	re and Mini Racks)			
Square 2 in. boxes	Holds 100 2 mL vials	Holds 100 2 mL vials	Holds 100 2 mL vials	Holds 100 2 mL vials	
Racks for 100 cell boxes	12 (1950683)	26 (1950866)	60 (1950696)	60 (1950683)	
Racks for 25 cell boxes	4 (1950686)	12 (1950871)	8 (1950685)	8 (1950686)	
Stages per rack	15	14	13	15	

> Specifications

Model	Model No.	LN ₂ Capacity (liters)	Electrical	Plug Type	Usable Interior height	Static Evaporation Rate	Neck Diameter	Inner Diameter	Weight (full)	Regulatory Listings	LN ₂ and Utility Connection
CryoExtra 20	CE8120	19500	100-230V 50/60hz	NEMA 5-15P	34.5 in./ 87.7 cm	5 L/day	12.5" (317mm)	28.2" (731 mm)	1340 lbs/ 608 kg	cULus	All models require 22 psi low pressure supply tank and are
CryoExtra 80	CE8120	40600		NEMA 5-15P	30.8 in./ 78.2 cm	7.5 L/day	17.5" (445mm)	38.7" (983 mm)	2140 lbs/ 971 kg		
CryoExtra 80	CE8120	80600		NEMA 5-15P	29.2 in./ 74.2 cm	12.5 L/day	25" (635mm)	54.75" (1391 mm)	4830 lbs/ 2191 kg	and CE	supplied with (1) 0.5 in. 45° flare stainless steel
CryoExtra 94	CE8120	93000		NEMA 5-15P	34.2 in. / 86.9 cm	12.5 L/day	25" (635mm)	54.75" (1391 mm)	4875 lbs/ 2211 kg	-	flexible transfer hose

Model	Model No.	LN ₂ Capacity (liters)	Electrical	Plug Type	Usable Interior height	Static Evaporation Rate	Neck Diameter	Inner Diameter	Weight (full)	Regulatory Listings	LN ₂ and Utility Connection
CryoExtra 20 MDD	CE8120M	19500	100-230V	NEMA 5-15P	34.5 in./ 87.7 cm	5 L/day	12.5" (317mm)	28.2" (731 mm)	260 lbs/ 117.9kg	cULus, CE and MDDIIa	All models require 22 psi low pressure supply tank and are supplied with (1) 0.5 in. 45° flare stainless steel flexible transfer hose
CryoExtra 40 MDD	CE8120M	40600		NEMA 5-15P	30.8 in./ 78.2 cm	7.5 L/day	17.5" (445mm)	38.7" (983 mm)	480 lbs/ 217.7 kg		
CryoExtra 80 MDD	CE8120M	80600	50/60hz	NEMA 5-15P	29.2 in./ 74.2 cm	12.5 L/day	25" (635mm)	54.75" (1391 mm)	550 lbs/ 249 kg		
CryoExtra 94 MDD	CE8120M	93000		NEMA 5-15P	34.2 in. / 86.9 cm	12.5 L/day	25" (635mm)	54.75" (1391 mm)	1070 lbs/ 484.3 kg		

^{*} Class lla medical device for diagnostic use; independent automated monitoring is recommended such as a chart recorder or electronic monitor. Not available in North America.

odel No. & Desc	eription	Dimensions H x W x D in. (cm)	Storage	CryoExtra 20	CryoExtra 40	CryoExtra 80	CryoExtra 9
quare Racks							
# =	1950696		Racks per vessel	12	26	60	60
	Rack includes cardboard boxes	28.4 x 5.5 x 6.3	Boxes per rack	13	13	13	13
	and cardboard dividers for	(72.1 x 14 x 16)	Vials per box	100	100	100	100
	1.5/2ml vials		Vials per vessel	15,600	33,800	78,000	78,000
*	4000007		Racks Per vessel	12	26	60	60
	Rack includes stainless steel	27.4 x 5.5 x 6.3	Boxes per rack	13	13	13	13
	boxes and cardboard dividers for	(69.6 x 14 x 16)	Vials per box	13	13	13	13
	1.5/2ml vials		Vials per vessel	15,600	33,800	78,000	78,000
E :	1950866		Racks per vessel	12	26	N/A	60
	Rack includes cardboard boxes and cardboard dividers for	30.6 x 5.5 x 6.3 (77.7 x 14 x 16)	Boxes per rack	14	14	N/A	14
			Vials per box	100	100	N/A	100
	1.5/2ml vials		Vials per vessel	16,800	36,400	N/A	84,000
# 3	4000008		Racks per vessel	12	26	60	60
	Rack includes cardboard boxes	25.4 x 5.5 x 6.3 (64.5 x 14 x 16)	Boxes per rack	8	8	8	8
	and cardboard dividers for 4ml		Vials per box	100	100	100	100
	vials		Vials per vessel	9,600	20,800	48,000	48,000
1	4000009		Racks per vessel	12	26	60	60
	Rack includes stainless steel	25.4 x 5.5 x 6.3	Boxes per rack	8	8	8	8
	boxes and cardboard dividers for	(64.5 x 14 x 16)	Vials per box	100	100	100	100
	4ml vials		Vials per vessel	9,600	20,800	48,000	48,000
1-1	4000010		Racks per vessel	12	26	60	60
	Rack includes cardboard boxes	26.6 x 5.5 x 6.3	Boxes per rack	7	7	7	7
	and cardboard dividers for 5ml	(67.6 x 14 x 16)	Vials per box	100	100	100	100
	vials		Vials per vessel	8,400	18,200	42,000	42,000
ecialty Rack	S						
HE - I -	4000379		Racks per vessel	12	26	26	60
		23.9 x 5.5 x 6.3	Canisters per rack	8	8	8	8
-	SUC-1 rack for cane storage (includes canisters #4000176)	(60.7 x 14 x 16)	Canes per canister	25	25	25	25
	(IIICIUUES CAIIISIEIS #4000176)		Canes per vessel	2,400	5,200	5,200	12,000

^{*} Each canister will hold 25 canes without cryo sleeves or 16 canes with cryosleeves

> Boxes and Dividers

Model No.	Description
Boxes	
4000014	Cardboard box with 100-cell divider for use with 1.5/2ml vials (does have drain hole)
4000015	Cardboard box with 100-cell divider for use with 4/5ml vials (does have drain hole)
820010	Polycarbonate box with 100-cell divider for use with 1.5/2ml vials with internal threaded caps (does have drain hole)
820011	Polycarbonate box with 81-cell divider for use with 1.5/2ml vials (does have drain hole)
820013	Polycarbonate box with 81-cell divider for use with 4ml vials (does have drain hole)
4000238	Stainless steel box for 1.5/2ml vials (does not include 100-cell divider)
4000239	Stainless steel box for 4ml vials (does not include 100-cell divider)
Cell Dividers	
4000013	100-cell divider for use in the 4000014, 4000015, 4000238, and 4000239 boxes

Model No. & Des	Model No. & Description		Storage	CryoExtra 20	CryoExtra 40	CryoExtra 80	CryoExtra 94
Vertical Rack	Vertical Racks						
	4000012		Racks per vessel	36	70	156	156
	Deale includes another and because	27.6 x 2.3 x 5.7	Boxes per rack	5	5	5	5
+	Rack includes cardboard boxes and cardboard dividers for 1.5/2ml vials	(70.1 x 5.8 x 14.5)	Vials per box	100	100	100	100
			Vials per vessel	18,000	35,000	78,000	78,000
	1950694		Racks per vessel	N/A	N/A	N/A	156
	Dock includes cardboard bayes	32.8 x 2.3 x 5.7	Boxes per rack	N/A	N/A	N/A	6
	Rack includes cardboard boxes and cardboard dividers for 1.5/2ml vials	(83.3 x 5.8 x 14.5)	Vials per box	N/A	N/A	N/A	100
	1.5/ ΔΙΙΙΙ νιαιο		Vials per vessel	N/A	N/A	N/A	93,600

lodel No. & De	scription	Dimensions H x W x D in. (cm)	Storage	CryoExtra 20	CryoExtra 40	CryoExtra 80	CryoExtra 9
rames and (Canisters						
D	1900585		Frames per vessel	184	364	690	690
H		27 x 0.7 x 3.4	Canisters per frame	7	7	7	7
B	Frame for 1950831 canister	(68.6 x 1.8 x 8.6)	Canisters per vessel	1,288	2,548	4,830	4,830
B	1950873		Frames per vessel	184	N/A	N/A	690
8	F f 1050001	30.8 x 0.7 x 3.4 (78.2 x 1.8 x 8.6)	Canisters per frame	8	N/A	N/A	8
3	Frame for 1950831 canister	(70.2 x 1.0 x 0.0)	Canisters per vessel	1,47	N/A	N/A	5,520
B	4000670		Frames per vessel	128	241	490	490
H	France for 4000010 conjeter	27.4 x 0.6 x 4.6 (69.6 x 1.5 x 11.7)	Canisters per frame	7	7	7	7
B	Frame for 4000610 canister	(09.0 X 1.3 X 11.7)	Canisters per vessel	896	1,687	3,430	3,430
В	1950687		Frames per vessel	128	N/A	N/A	490
8	France for 4000010 conjeter	31.2 x 0.6 x 3.8 (79.2 x 1.5 x 9.7)	Canisters per frame	8	N/A	N/A	8
3	Frame for 4000610 canister	(13.2 x 1.3 x 3.1)	Canisters per vessel	1,024	N/A	N/A	3,920
D	1950688		Frames per vessel	100	268	382	382
H	From for 1000225 conjeter	29.6 x 0.7 x 6.5 (75.2 x 1.8 x 16.5)	Canisters per frame	5	5	5	5
13	Frame for 4000335 canister	(70.2 x 1.0 x 10.0)	Canisters per vessel	500	1,020	1,910	1,910
D	1950689		Frames per vessel	82	158	304	304
H	France for 4000000 conjeter	29.6 x 0.7 x 8.2 (75.2 x 1.8 x 20.8)	Canisters per frame	5	5	5	5
13	Frame for 4000336 canister	(7 0.2 × 1.0 × 20.0)	Canisters per vessel	410	791	1,520	1,520
	4000368		Frames per vessel	68	138	265	265
H	Frame for 4000332 and	(67.1 X 2.3 X 15.5)	Canisters per frame	4	4	4	4
12	4000356 canisters		Canisters per vessel	272	552	1,060	1,060
D	1950692	29.6 x 0.9 x 6.5 (75.2 x 2.3 x 16.5)	Frames per vessel	68	N/A	N/A	265
H	Frame for 4000332 and		Canisters per frame	5	N/A	N/A	5
13	4000356 canisters		Canisters per vessel	340	N/A	N/A	1,325
DI.	4000369	00.4.4.40	Frames per vessel	44	80	164	164
-	Frame for 4000333 and	26.4 x 1 x 10 (67.1 x 2.5 x 25.4)	Canisters per frame	4	4	4	4
1	4000357 canisters	(6111 / 2.6 / 2611)	Canisters per vessel	176	320	656	656
B	1950693	00.0 1 10	Frames per vessel	44	N/A	N/A	164
H	Frame for 4000333 and	32.9 x 1 x 10 (83.6 x 2.5 x 25.4)	Canisters per frame	5	N/A	N/A	5
12	4000357 canisters	(00.0 % 2.0 % 20.1)	Canisters per vessel	220	N/A	N/A	820
anisters for	Above Frames						
	1950831	3.6 x 3.915 x 0.375	(9.14 x 9.94 x 0.95)	Sliding canister fo	r 25ml bag		
A	4000610	3.7 x 6.3 x 0.5	(9.4 x 16 x 1.3)	Swing arm caniste	er for 50ml bag (Fen	ıwal 4R9951 or equ	ivalent)
	4000335	5.5 x 7.6 x 0.4	(14 x 19.3 x 1)	Sliding canister fo	r 250ml bag (Fenwa	al 4R5461 or equiva	lent)
	4000336	5.6 x 9.2 x 0.4 (14.2 x 23.4 x 1)	Sliding canister fo	r 500ml bag (Fenwa	al 4R5462 or equiva	lent)
1	4000332	6.4 x 7.8 x 0.8 (16.3 x 19.1 x 2)		Sliding canister fo	r 200ml bag (Gamb	ro DF-200 or equiva	llent)
	4000356	6.4 x 7.8 x 0.8 (16.3 x 19.1 x 2)	Swing arm caniste	er for 200ml bag (Ga	ambro DF-200 or ed	uivalent)
	4000333	6.5 x 11.8 x 0.8	(16.5 x 30 x 2)	Sliding canister fo	r 700ml bag (Gamb	ro DF-700 or equiva	llent)
6				, and the second			,
	4000357	6.5 x 12.1 x 0.8	(16.5 x 30.7 x 2)	Swing arm caniste	er for 700ml bag (Ga	ambro DF-700 or ed	uivalent)

Model No. & Des	Model No. & Description Dime		Storage	CryoExtra 20	CryoExtra 40	CryoExtra 80	CryoExtra 94
Mini Square R	acks for Liquid Phase Stor	age					
457	1950685		Racks Per vessel	4	12	8	8
			Boxes per rack	13	13	13	13
	Rack includes cardboard boxes	28.5 x 3.2 x 3.3	Vials per box	25	25	25	25
	and cardboard dividers for 1.5/2ml vials	(72.4 x 8.1 x 8.4)	Vials per vessel	1,300	3,900	2,600	2,600
	1950871	30.7 x 3.2 x 3.3	Racks Per vessel	4	12	N/A	8
	Rack includes cardboard boxes		Boxes per rack	14	14	N/A	14
	and cardboard dividers for		Vials per box	25	25	N/A	25
	1.5/2ml vials		Vials per vessel	1,400	4,200	N/A	2,800
1050005	1950686		Racks Per vessel	N/A	N/A	N/A	8
	Rack includes cardboard boxes	32.9 x 3.2 x 3.3	Boxes per rack	N/A	N/A	N/A	15
	and cardboard dividers for	(83.6 x 8.1 x 8.4)	Vials per box	N/A	N/A	N/A	25
1950685	1.5/2ml vials		Vials per vessel	N/A	N/A	N/A	3,000

> Boxes and Dividers

Model No. & Description



Model No. & D	model No. & Description							
Boxes								
189470	Mini cardboard box - 2.75" x 2.75" x 2" for use with 25-cell divider for use with 1.5/2ml vials							
Cell Dividers								
189387	25-cell divider for use in the 189470 box							

1950836	Model No. & Des	cription	Dimensions H x W x D in. (cm)	Storage	CryoExtra 20	CryoExtra 40	CryoExtra 80	CryoExtra 94
1950839		rix 2D Racks –						
1960839		1950836		Racks per vessel	24	52	94	94
1960839	THE STATE OF THE S	Rack for Matrix 2D plates		Plates per rack	18	18	18	18
1950840 27.5 x 5.313 x 3.65 (70 x 13.5 x 9.3) Plates per rack 11 11 11 11 11 11 11	ALL THE STATE OF T			Plates per vessel	432	936	1,692	1,692
1950840 27.5 x 5.313 x 3.65 (70 x 13.5 x 9.3) Plates per rack 11 11 11 11 11 11 11		1950839		Racks per vessel	24	52	94	94
1950840 27.5 x 5.313 x 3.65 (70 x 13.5 x 9.3) Plates per rack 11 11 11 11 11 11 11				Plates per rack	12	12	12	12
1950841 27.5 x 5.313 x 3.65 Flates per vessel 24 52 94 94 94		measuring 1.55" to 2.15" tall		Plates per vessel	288	624	1	1
1950841 27.5 x 5.313 x 3.65 Flates per vessel 24 52 94 94 94		1950840		Racks per vessel	24	52	94	94
1950841 27.5 x 5.313 x 3.65 Flates per vessel 24 52 94 94 94				Plates per rack	11	11	11	11
1950842 Rack for Matrix 2D Plates measuring 1.022" to 1.994" tall 33 x 5.313 x 3.65 (83.8 x 13.5 x 9.3) Plates per rack 22		measuring 2.3" tall		Plates per vessel	308	572	1,034	1,034
1950842 Rack for Matrix 2D Plates measuring 1.022" to 1.994" tall 33 x 5.313 x 3.65 (83.8 x 13.5 x 9.3) Plates per rack 22	** **	1950841		Racks per vessel	24	52	94	94
1950842 Rack for Matrix 2D Plates measuring 1.022" to 1.994" tall 33 x 5.313 x 3.65 (83.8 x 13.5 x 9.3) Plates per rack 22			(70 x 13.5 x 9.3)	Plates per rack	7	7	7	7
1950842 Rack for Matrix 2D plates measuring 1.022" to 1.994" tall 33 x 5.313 x 3.65 (83.8 x 13.5 x 9.3) Plates per rack 22 N/A N/A 22				Plates per vessel	168	364	658	658
1950843 Racks per vessel 24 52 94 94	Racks for Mat	rix 2D Racks – Vapor Phas	:					
1950843 Racks per vessel 24 52 94 94		1950842		Racks per vessel	24	52	94	94
1950843 Racks per vessel 24 52 94 94				Plates per rack	22	N/A	N/A	22
Rack for Matrix 2D plates measuring 1.55" to 2.15" tall 31.7 x 5.313 x 3.65 (80.5 x 13.5 x 9.3) Plates per rack 14 N/A N/A 14 N/A 14 N/A 1316 612		measuring 1.022 to 1.994 tail		Plates per vessel	528	N/A	N/A	2,068
1950844 Racks per vessel 24 52 94 94 Rack for Matrix 2D plates measuring 2.3" tall Plates per rack 13 N/A N/A N/A 13 Plates per vessel 312 N/A N/A 1,222		1950843		Racks per vessel	24	52	94	94
1950844 Racks per vessel 24 52 94 94 Rack for Matrix 2D plates measuring 2.3" tall Plates per rack 13 N/A N/A N/A 13 Plates per vessel 312 N/A N/A 1,222				Plates per rack	14	N/A	N/A	14
		measuring 1.55" to 2.15" tall		Plates per vessel	336	N/A	1316	612
		1950844		Racks per vessel	24	52	94	94
				Plates per rack	13	N/A	N/A	13
1950845 Racks per vessel 24 52 94 94 Rack for Matrix 2D plates measuring 3.78" tall (79.7 x 13.5 x 9.3) Plates per rack 8 N/A N/A N/A 8		measuring 2.3" tall		Plates per vessel	312	N/A	N/A	1,222
Rack for Matrix 2D plates measuring 3.78" tall 31.4 x 5.313 x 3.65 (79.7 x 13.5 x 9.3) Plates per rack 8 N/A N/A 8		1950845		Racks per vessel	24	52	94	94
measuring 3.78" tall				Plates per rack	8	N/A	N/A	8
Plates per vessel 192 N/A N/A 752	3:	measuring 3.78" tall		Plates per vessel	192	N/A	N/A	752

cost-effective storage



Thermo Scientific BioCane Canister and Cane Systems

Thermo Scientific BioCane storage systems provide a cost effective way to store biological samples in canes. Available in four sizes, the system can safely hold samples for extended periods of time without replenishing LN₂.

- · All models include stainless steel canisters
- Canister handles are color-coded for easy canister identification
- Durable aluminum construction and vacuum insulation
- Narrow-mouth design minimizes LN₂ evaporation
- Lockable lid and optional low level alarm enhance sample security
- Available accessories
 - Roller base
- Canes
- Low level alarm Cryo Sleeves

Thermo Scientific BioCane Storage Systems

	BioCane 20	BioCane 34	BioCane 47	BioCane 73
Catalog No.	CK509X2	CK509X3	CK509X4	CK509X6
LN ₂ capacity (liters)	20.5	34.8	47.4	73
Canisters per unit	6	6	6	8
Canes per canister	5	20	42	42
Total vial capacity (6/cane)	180	720	1512	2016
Total straw capacity (10/cane)	300	1200	2520	3360
Static holding time (days)	227	193	121	121
Neck diameter	2 in. / 5.1 cm	3.5 in. / 8.8 cm	5 in. / 12.7 cm	6 in. / 15.2 cm
Exterior dimensions (Diameter x height)	14.5 x 25.7 in. 36.8 x 65.3 cm	18.2 x 26.6 in. 47.2 x 67.6 cm	20 x 26.5 in. 50.8 x 67.3 cm	22 x 27.3 in. 55.9 x 69.3 cm
Shipping weight	29 lbs. / 13.2 kg	41 lbs. / 18.6 kg	47 lbs. / 21.4 kg	95 lbs./ 43.2 kg
Regulatory listings	CE	CE	CE	CE



> Thermo Scientific BioCane Accessories

	BioCane 20	BioCane 34	BioCane 47	BioCane 73
Vials, 1 mL, case of 500	AY509X32	AY509X32	AY509X32	AY509X32
Cryogenic vials(E), case/500, 1.2 mL, 13.5mm O.K., 38.1mm H	AY509X13	AY509X13	AY509X13	AY509X13
Vials, 1.5 mL, case of 500	AY509X33	AY509X33	AY509X33	AY509X33
Cryogenic vials(E), case/500, 2.0 mL, 13.5mm 0.K., 48.3mm H	AY509X12	AY509X12	AY509X12	AY509X12
Low level alarm	8130	8130	8130	8130
Wheeled accessory cart (5 in. high)	AY509X9	AY509X9	AY509X9	AY509X1
Square rack option interchangeable with canisters (includes 5 cardboard boxes, each box with 25 cell dividers*	N/A	N/A	195555	N/A
One cryo cane, 1.2 mL - 6 ampule	4000211	4000211	4000211	4000211
CryoSleeve (100 per case, length 273 mm / 10.75 in.)	4000218	4000218	4000218	4000218





> Thermo Scientific Locator PLUS Storage Systems

Catalog No	Ultrasonic Level Monitor	LN ₂ Capacity (liters)	Rack Per Unit	Box Capacity Per Rack	2mL vials Per Box	2 mL Vial Capacity (full unit)	Static Holding Time (days)	Neck Diameter	Exterior Dimensions (Diameter x Height)	Shipping Weight	Regulatory Listings
Locator Jr PLUS		i									
CY50925-70	n/a			5				8.5 in. / 21.5 cm			CE
CY509106		74	4		100	0000	00		22 x 26.9 in	91 lbs. /	-004
CY509106CN (China Only)	standard	71			100	2000	83		55.8 x 68.3 cm	41.4 kg	cCSAus and CE
Locator 4 PLUS			'	,			1	·		l	1
CY50935-70	n/a										CE
CY509108		121	4	10	100	4000	122	8.5 in. / 21.5 cm	22 x 37.5 in 55.8 x 95.3 cm	118 lbs. / 53.5 kg	-004
CY509108CN	standard	121									cCSAus and CE
(China Only)											and of
Locator 6 PLUS											
CY50985-70	n/a			10	100	6000	0 185	8.5 in. / 21.5 cm	26 x 37.5 in 66 x 95.3 cm	160 lbs. / 72.6 kg	CE
CY509109		standard 184	6								cCSAus
CY509109CN (China Only)	standard		0	10							and CE
Locator 8 PLUS											
CY50945-70	n/a			10	25			201 6 in. / 15.2 cm	22 x 37.5 in		CE
CY509111	standard	121				2000	201			115 lbs. /	a00Aa
CY509111CN (China Only)			121	8	10	20	2000	201	0 III. / 13.2 CIII	55.8 x 95.3 cm	52.2 kg

> Thermo Scientific Locator PLUS Accessories

	Locator Jr. PLUS	Locator 4 PLUS	Locator 6 PLUS	Locator 8 PLUS
5.0 mL vial rack , does not include boxes	HR509X19A-70	HR509X20A-70	HR509X32A-70	N/A
Boxes, 2 in. height: 1.0 and 1.5 mL Nalgene, 100 vial per box, case of 10	CS509X24	CS509X24	CS509X24	N/A
Boxes, 2 in. height: 2 mL Nalgene, 25 vial per box, case of 80	N/A	N/A	N/A	CS509X3
Boxes, 2 in. height: 2 mL Nalgene, 81 vial per box, case of 40	CS509X4	CS509X4	CS509X4	N/A
Boxes, 2 in. height: 2 mL Nalgene, 81 vial per box, case of 20	CS509X5	CS509X5	CS509X5	N/A
Boxes, 4 in. height: 5 mL Nalgene, 81 vial per box, each	CS509X10	CS509X10	CS509X10	N/A
Vials, 1 mL, case of 500	AY509X32	AY509X32	AY509X32	AY509X32
Cryogenic vials(E), case/500, 1.2 mL, 13.5 mm O.K., 38.1 mm H	AY509X13	AY509X13	AY509X13	AY509X13
Vials, 1.5 mL, case of 500	AY509X33	AY509X33	AY509X33	AY509X33
Cryogenic vials(E), case/500, 2.0 mL, 13.5 mm 0.K., 48.3 mm H	AY509X12	AY509X12	AY509X12	AY509X12
Low level alarm	8130	8130	8130	8130
Wheeled accessory cart (5 in. high)	AY509X9	AY509X9	AY509X9	AY509X1
Customer installed level monitor 100-240V	CN509X16-70	CN509X17-70	CN509X15	CN509X7-70
One cryo cane, 1.2 mL – 6 Ampule	4000211	4000211	4000211	4000211
Log book	1950338	1950338	1950338	1950338
CryoClaw	AY509X18	AY509X18	AY509X18	AY509X18
Replacement suction cups (2) for CryoClaw	AY509X19	AY509X19	AY509X19	AY509X19

simplified storage and retrieval

Thermo Scientific Locator Rack and Box Systems

Thermo Scientific Locator indexed storage systems provide cost-effective sample storage and allow for efficient sample retrieval. All models are available with an ultrasonic level monitor.

- Outstanding temperature uniformity: samples are stored below -180°C even when less than 2 in. (5 cm) of liquid nitrogen remains in the vessel
- Ultrasonic Level Monitor safeguards irreplaceable samples
 - Optional monitor provides continuous LED readout of liquid nitrogen level; activates visual and audible alarms when level falls below safe range
- Lockable lid enhances sample security

- Includes stainless steel racks designed for use with 2 in.
 (5 cm) Nalgene cryogenic boxes (larger racks available for 5.0 mL ampoules in Locator Jr. and Locator 4)
- Available accessories
 - Roller base
 - Polycarbonate boxes
 - Cryogenic vials
 - Cryo logbook
 - CryoClaw
 - Low-level alarm





> Thermo Scientific Locator Storage Systems

Catalog No	Level Monitor	LN ₂ Capacity (liters)	Rack Per Unit	Box Capacity Per Rack	2mL vials Per Box	2 mL Vial Capacity (full unit)	Static Holding Time (days)	Neck Diameter	Exterior Dimensions (diameter x height)	Shipping Weight	Regulatory Listings									
Locator Jr																				
CY50925	n/a										CE									
CY509105		60	4	4	100 16	1600	70	8.5 in/ 21.5 cm	22 x 26.9 in	90 lbs. /	cCSAus									
CY509105CN	standard	4	4	100	1000	70	0.0 111/ 21.0 0111	55.8 x 68.3 cm	40.8 kg	and CE										
(China Only)											and or									
Locator 4																				
CY50935	n/a			9	100	3600	112	8.5 in/ 21.5 cm	22 x 37.5 in 55.8 x 95.3 cm	115 lbs. / 52.2 kg	CE									
CY509107		111	4								cCSAus									
CY509107CN	standard										and CE									
(China Only)											and GL									
Locator 8																				
CY50945	n/a										CE									
CY509110		111	444	8		0.5	1000	105	05 05 / 15 0	22 x 37.5 in	117 lbs. /	-004								
CY509110CN (China Only)	standard		0		0	0	0	0	O	0	0	ŏ	ğ	Ö	9	25	1800	185	6 in/ 15.2 cm	55.8 x 95.3 cm

> Thermo Scientific Locator Accessories

	Locator Jr.	Locator 4	Locator 8
5.0 mL vial Rack , does not include boxes	HR509X19A-70	HR509X20A-70	N/A
Boxes, 2 in. height: 1.0 and 1.5 mL Nalgene, 100 vial per box, case of 10	CS509X24	CS509X24	N/A
Boxes, 2 in. height: 2 mL Nalgene, 25 vial per box, case of 80	N/A	N/A	CS509X3
Boxes, 2 in. height: 2 mL Nalgene, 81 vial per box, case of 40	CS509X4	CS509X4	N/A
Boxes, 2 in. height: 2 mL Nalgene, 81 vial per box, case of 20	CS509X5	CS509X5	N/A
Boxes, 4 in. height: 5 mL Nalgene, 81 vial per box, each	CS509X10	CS509X10	N/A
Vials, 1 mL, case of 500	AY509X32	AY509X32	AY509X32
Cryogenic Vials(E), case/500, 1.2 mL, 13.5 mm 0.K., 38.1 mm H	AY509X13	AY509X13	AY509X13
Vials, 1.5 mL, case of 500	AY509X33	AY509X33	AY509X33
Cryogenic Vials(E), case/500, 2.0 mL, 13.5 mm 0.K., 48.3 mm H	AY509X12	AY509X12	AY509X12
Low level alarm	8130	8130	8130
Wheeled accessory cart (5 in. high)	AY509X9	AY509X9	AY509X1
Customer installed level monitor 100-240V	CN509X16-70	CN509X17-70	CN509X7-70
One cryo cane, 1.2 mL – 6 Ampule	4000211	4000211	4000211
Log book	1950338	1950338	1950338
CryoClaw	AY509X18	AY509X18	AY509X18
Replacement suction cups (2) for CryoClaw	AY509X19	AY509X19	AY509X19

Thermo Scientific Liquid Nitrogen Transfer Vessels

Designed for storing and dispensing small amounts of liquid nitrogen, our Thermo Series includes four models with capacities from 5 to 32 L.

- Designed to bring liquid nitrogen to other cryo vessels
- Lightweight aluminum design and small neck opening insures ease of handling and low static evaporation rates
- Compact Thermo 5 and 10 dewars feature a convenient handle for pouring and for use in applications where only small quantities of liquid nitrogen are needed
- Thermo 10, 20 and 30 can be fitted with an optional self-pressurized withdrawal device to easily dispense LN, without pouring
- Available accessories
 - Withdrawal device
 - 12 mL dipper
 - Roller base

convenient LN, transfer







> Thermo Scientific LN₂ Storage Vessels

	Thermo 5	Thermo 10	Thermo 20	Thermo 30
Model No.	TY509X1	TY509X2	TY509X3	TY509X4
LN ₂ capacity (liters)	5	10	20	32
Static holding time (days)	33.3	55.6	111	145
Neck diameter	2.2 in/ 5.6 cm	2.2 in/ 5.6 cm	2 in/ 5.0 cm	2.5 in/ 6.4 cm
Exterior dimensions (Diameter x height)	8.8 x 18.2 in. 22.4 x 46.2 cm	10.3 x 21.5 in. 26.2 x 54.6 cm	8.8 x 18.2 in. 36.8 x 62.7 cm	8.8 x 18.2 in. 43.2 x 61.2 cm
Shipping weight	12 lbs. / 5.5 kg	14 lbs. / 6.4 kg	24 lbs. / 10.9 kig	30 lbs. / 13.6 kg

> Accessories

	Thermo 5	Thermo 10	Thermo 20	Thermo 30
Description				
Withdrawal device	N/A	AY509X5	AY509X4	AY509X3
12 mL dipper	AY509X6	AY509X6	AY509X6	AY509X6
Wheeled accessory cart (5 in. high)	N/A	N/A	AY509X9	AY509X9

Thermo Scientific Arctic Express Storage Systems

Our Arctic Express and Arctic Express Dual systems protect samples during shipment and storage. Featuring excellent flexibility and safety features, these systems can be used as dry shippers or laboratory cryo storage vessels.

Arctic Express IATA-Shipper Transport Systems

- Worldwide shipment of precious samples with safety and security; approved for UN and IATA
- Two-week holding time preserves sample integrity
- Lockable cover with internal security compartment provides protection and sample isolation
- Aluminum container with handle holds internal security compartment

Arctic Express Cryogenic Shipping Containers

- Innovative material absorbs liquid nitrogen to prevent spillage during shipment
- 14- and 21-day liquid nitrogen holding times allow specimens to be shipped safely
- Durable construction and sturdy base allow dry shipper to withstand rough handling
- Lockable lid prevents unauthorized entry
- Easily transported via most common carriers
- Lightweight aluminum design and convenient pail-style handle

Arctic Express Dual Shipper Storage Systems

- When filled with liquid nitrogen, Arctic Express dual shippers can be used as a canister and cane storage system indefinitely with static holding times of up to 125 days
- Dual shippers hold six numbered, colorcoded, stainless steel cans, (included) which accommodate canes that hold ampoules
- Hard-shell shipping container comes standard for both Arctic Express and Dual Shippers

safe sample shipping







> Thermo Scientific Artic Express $\mathrm{LN}_{\scriptscriptstyle 2}$ Vapor Shipping Systems

Model	Arctic Express 5	Arctic Express 10	Arctic Express 20	Arctic Express IATA
	•		•	<u> </u>
Catalog No.	CY50915	CY50905	CY50910	CY50920
LN ₂ capacity (liters)	1.5	4.3	10	10
Canisters per unit	1	1	n/a	internal security compartment
Canes per canister	3	8	161	n/a
2mL Vials per cane	3	6	6	n/a
2 mL Vial capacity	9	48	966	480
Total straw capacity	15	120	1610	n/a
Static holding time (days)	8	21	14	14
Neck diameter	1.4 in. / 3.5 cm	2 in. / 5.0 cm	8.5 in. / 21.6 cm	8.5 in. / 21.6 cm
Exterior dimensions	7.3 x 13.5 in.	8.7 x 19.4 in.	15 x 23 in.	15 x 23 in.
(Diameter x height)	18.5 x 34.3 cm	22.1 x 49.3 cm	38.1 x 58.4 cm	38.1 x 58.4 cm
Shipping weight	24 lbs. / 10.9 kg	29 lbs. / 13.2 kg	52 lbs. /23.6 kg	58 lbs. / 26.4 kg
Regulatory listings	CE	CE	CE	CE and IATA

) Thermo Scientific Artic Express $\ LN_{_2}$ Vapor Shipping Systems

Model	Arctic Express Dual 10	Arctic Express Dual 20	Arctic Express Dual 28
Catalog No.	CK50920	Ck50921	CY50922
LN ₂ capacity (liters)	10	18.5	28
LN ₂ capacity-absorbed (liters)	3	3	8
Canisters per unit	6	6	6
Canes per canister	5	6	21
2 mL Vial capacity (6/cane)	180	216	756
Total straw capacity (10/cane)	300	360	1260
Static holding time – shipper (days)	21	21	21
Static holding time (days)	42	125	50
Neck diameter	2 in. / 5 cm	2.2 in. / 5.6 cm	3.8 in. / 9.7 cm
Exterior dimensions (Diameter x height)	10.2 x 21.6 in. 25.9 x 54.9 cm	14.5 x 25.7 in. 36.8 x 65.3 cm	18.2 x 22 in. 46.2 x 55.9 cm
Shipping weight	34 lbs. / 15.5 kg	46 lbs. / 20.9 kg	60 lbs. / 27.3 kg
Regulatory listings	CE	CE	CE



- Durable, corrosion-resistant stainless steel exterior
- Shallow wide-mouth ideal for applications requiring flash freezing
- Convenient dish-shaped design perfect for benchtop use
- "Push-fit" insulated lid, vented to prevent pressure build-up

Thermo Scientific Benchtop Liquid Nitrogen Containers

Model No.	LN ₂ Capacity (liters)	Inside Neck Diameter	Exterior Dimensions (diameter x height)	Shipping Weight
2129	1	5.1 in. / 13 cm	6.3 x 4.5 in. 16 x 11.4 cm	8 lbs. / 3.6 kg
2130	1.9	6.1 in. / 15.5 cm	7.3 x 5.4 in. 18.5 x 13.7 cm	10 lbs. / 4.5 kg
2122	1.01	3.4 in. / 8.6 cm	4.6 x 9 in. 11.7 x 22.9 cm	6 lbs. / 2.7 kg
2123	2.01	4.2 in. / 10.7 cm	5.6 x 10.6 in. 14.2 x 26.9 cm	8 lbs. / 3.6 kg
2124	4.51	5.9 in. / 15 cm	7.2 x 13.8 in. 18.3 x 35.1 cm	10 lbs. / 4.5 kg

Model No.	Description
AY509X6	12 mL Dipper





Thermo Scientific LN₂ Supply Tanks

All of our stainless steel LN₂ supply tanks are rated at 22 psi.

> Thermo Scientific LN₂ Supply Tanks

Catalog No.	LN ₂ Capacity (liters)	Casters	Static Evaporation Rate (per day)	Exterior Dimensions (diameter x height)	Shipping Weight	
8127	50	standard	4%	16 x 41 in.	136 lbs. / 62 kg	
8127CE*	30	Stanuaru 470		40.6 x 104.1 cm	100 lb3. 7 02 kg	
8120TF	180	n/a	2%	20 x 63.3 in.	326 lbs. / 148 kg	
8120CE*	100	II/a	2.70	50.8 x 161.3 cm	320 lbs. / 140 kg	
8121	230	standard	2%	26.0 x 54.8 in.	425 lbs. / 193 kg	
8121CE*	230	Stariuaru	2.70	66 x 139.2 cm	423 lbs. / 195 kg	

^{* (}outside North America)

Tank Rating for all models: 22 psi

Cryopreservation accessories



- 1 Cell dividers
- 2 Square box with hole
- 3 Rectangular cardboard box
- 4 Polycarbonate boxes
- 5 LN₂ measuring stick
- 6 CryoClaw
- 7 Cryo gloves
- 8 Cryo Sleeve with optional cane
- 9 Cryo markers
- T-valve assembly
- 11 Phase separator
- 12 Tongs

- 13 Sensaphone dialing system
- Low-level alarm with sensor
- 5 Flexible Metal hose

Cryo Vials	
Each vial is constructed of sterile polypropylene with	a
white marking area and includes a screw cap.	
1.2 mL, self-standing, conical interior bottom, silicone washer, one case of 500	4000198
2.0 mL, self-standing, round interior bottom,	4000200
silicone washer, one case of 500	4000200
4.0 mL, self standing, round bottom, silicone washer, one case of 500	4000206
5.0 mL, round bottom, silicone washer, one case of 500	4000208
Cryo Vial Color Coding Caps	4000200
Rainbow (assortment of all colors), one case of 400	4000389
Cryo Boxes	4000000
Individual	
2.0 in. (5.1 cm) rectangular cardboard box,	4000189
includes a 40-cell divider (for CryoPlus models) 2.0 in. (5.1 cm) square stainless steel box,	
does not include a 100-cell divider	4000238
2.0 in. (5.1 cm) square cardboard box, includes a 100-Cell Divider (for CryoPlus models)	4000014
2.75 in. (7.0 cm) square cardboard box, does not include a 25-Cell Divider (for CryoPlus models)	189470
3.0 in. (7.6 cm) square cardboard box, includes a 100-cell divider (for CryoPlus models)	4000015
2.0 in. (5.1 cm) high polycarbonate box with 100-cell divider, includes a numerical grid system printed on the cover	820010
2.0 in. (5.1 cm) high polycarbonate box with 81-cell divider, includes a numerical grid system printed on the cover	820011
3.0 in. (5.1 cm) high polycarbonate box with 81-cell divider, includes a numerical grid system printed on the cover	820013
Dividers	
Cardboard 100-cell divider	4000013
Cardboard 40-cell divider	4000174
Cardboard 25-cell divider	189387
Canes	
One cane, 1.2 mL - 6 ampoule	4000211
One aluminum cane for storage of 12.5 mm diameter Cryo Tubes	4000217
One Cane, 5.0 mL – 2 Ampoule	4000214
One aluminum cane for 9.2 mL and 10.0 mL goblets	4000216
Cryo Sleeve	
Polyvinyl Sleeve, 0.6 in. (1.5 cm) interior diameter, 10.8 in. (27.4 cm) long, one case of 100	4000218
Tongs	
Transport vials from freezing racks to boxes	
Stainless steel cryo tongs	4000388
Claws	
Retrieve fallen object in the LN ₂ vessels	
CryoClaw	AY509X18
Replacement suction cups for CryoClaw	AY509X19

Bolta Bolt	Measuring Stick	
Mid-Arm, 14.0 in. to 15.0 in. (35.6 cm to 38.1 cm) Small 189441 Medium 189442 Large 189443 Elbow-Length, 18.0 in. to 20.0 in. (45.7 cm to 50.8 cm) Medium Medium 189445 Extra-Large 189447 Shoulder-Length, 28.0 in. (71.1 cm) Medium Medium 189448 Large 189449 Extra-Large 189450 Aprons Small, 36.0 in. W (91.4 cm) 189451 Medium, 42.0 in. W (106.7 cm) 189452 Large, 48.0 in. W (121.9 cm) 189453 Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 4000221 Black, set of 4 4000221 LN ₂ Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000400 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000401 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000401 6.0 graph and the programmed numbers, 120 of 0 Hz 4000571 Low-Level Alarm 400040	LN ₂ Measuring Stick	180143
Mid-Arm, 14.0 in. to 15.0 in. (35.6 cm to 38.1 cm) Small 189441 Medium 189442 Large 189443 Elbow-Length, 18.0 in. to 20.0 in. (45.7 cm to 50.8 cm) Medium Medium 189445 Extra-Large 189447 Shoulder-Length, 28.0 in. (71.1 cm) Medium Medium 189448 Large 189449 Extra-Large 189450 Aprons Small, 36.0 in. W (91.4 cm) 189451 Medium, 42.0 in. W (106.7 cm) 189452 Large, 48.0 in. W (121.9 cm) 189453 Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 4000221 Black, set of 4 4000221 LN ₂ Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000400 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000401 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000401 6.0 graph and the programmed numbers, 120 of 0 Hz 4000571 Low-Level Alarm 400040	Gloves (Water Proof Cryo)	
Medium		
Elbow-Length, 18.0 in. to 20.0 in. (45.7 cm to 50.8 cm) Medium	Small	189441
Elbow-Length, 18.0 in. to 20.0 in. (45.7 cm to 50.8 cm) Medium Large 189445 Large 189446 Extra-Large 189447 Shoulder-Length, 28.0 in. (71.1 cm) Medium 189448 Large 189449 Extra-Large 189450 Aprons Small, 36.0 in. W (91.4 cm) Medium, 42.0 in. W (106.7 cm) 189451 Medium, 42.0 in. W (121.9 cm) Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 Black, set of 4 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz	Medium	189442
Medium	Large	189443
Large	Elbow-Length, 18.0 in. to 20.0 in. (45.7 cm to 50.8 cm)	
Extra-Large Shoulder-Length, 28.0 in. (71.1 cm) Medium Large 189448 Large Extra-Large 189450 Aprons Small, 36.0 in. W (91.4 cm) Medium, 42.0 in. W (106.7 cm) Large, 48.0 in. W (121.9 cm) 189452 Large, 48.0 in. W (121.9 cm) 189453 Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 Black, set of 4 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 4 pool83 T-Valve Assembly Lylave assembly with fittings used to connect two transfer.	Medium	189445
Shoulder-Length, 28.0 in. (71.1 cm) Medium	Large	189446
Medium	Extra-Large	189447
Large	Shoulder-Length, 28.0 in. (71.1 cm)	
Extra-Large 189450 Aprons Small, 36.0 in. W (91.4 cm) 189451 Medium, 42.0 in. W (106.7 cm) 189452 Large, 48.0 in. W (121.9 cm) 189453 Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 4000221 Black, set of 4 4000222 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000401 Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT 4000401 Low-Level Alarm 120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm 52 container, includes dry contacts for remote alarm 52 container, includes dry contacts for remote alarm 53 censaphone 72 Telephone Dialing Systems 74 pre-programmed numbers, 120V 60 Hz 75 400182 75 400183 75 FValve Assembly 75 FValve assembly with fittings used to connect two transfer 17 for the programmed numbers, 120V 50 Hz 17 for the programmed reports as the propagation of the programmed numbers, 120V 60 Hz 17 for the programmed n	Medium	189448
Aprons Small, 36.0 in. W (91.4 cm) Medium, 42.0 in. W (106.7 cm) Large, 48.0 in. W (121.9 cm) 189453 Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 Black, set of 4 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 400183 T-Valve Assembly T-Valve assembly with fittings used to connect two transfer.	Large	189449
Small, 36.0 in. W (91.4 cm) 189451 Medium, 42.0 in. W (106.7 cm) 189452 Large, 48.0 in. W (121.9 cm) 189453 Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 4000221 Black, set of 4 4000222 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000400 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm Low-Level Alarm Low-Level Alarm Low-Level Alarm 8130 Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 400047 4 pre-programmed numbers, 120V 60 Hz 400134 8 pre-programmed numbers, 120V 60 Hz 400134 8 pre-programmed numbers, 220V 50 Hz* 400134 T-Valve Assembly	Extra-Large	189450
Medium, 42.0 in. W (106.7 cm) Large, 48.0 in. W (121.9 cm) Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 Black, set of 4 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 189453 189452 189453 4000222 14000221 14000222 14000400 1500400400 1600400400 1600400 1600400 1600400 17004	Aprons	
Large, 48.0 in. W (121.9 cm) Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 Black, set of 4 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 400183 T-Valve Assembly Lylaye assembly with fittings used to connect two transfer.	, ,	
Cryo Marker Pens Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 Black, set of 4 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 400183 T-Valve Assembly T-Valve assembly with fittings used to connect two transfer.	Medium, 42.0 in. W (106.7 cm)	189452
Fine tip, fast-drying, non-smearing, permanent ink; recommended for all Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 Black, set of 4 4000222 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 220V 50 Hz* 1-Valve Assembly 1-Valve assembly with fittings used to connect two transfer.	Large, 48.0 in. W (121.9 cm)	189453
Cryogenic vials at -200C (-328F). Black, blue, green, and red, set of 4 4000221 Black, set of 4 4000222 LN₂ Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN₂ container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 220V 50 Hz* 1-Valve Assembly 1-Valve assembly with fittings used to connect two transfer.	Cryo Marker Pens	
Black, set of 4 LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 220V 50 Hz* 1-Valve Assembly T-Valve assembly with fittings used to connect two transfer		ended for all
LN2 Transfer Hoses and Phase Separator 4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 4000401 4000401 4000401 4000401 4000401 4000401 4000571 Complete Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 1-Valve Assembly T-Valve Assembly	Black, blue, green, and red, set of 4	4000221
4.0 ft. (1.2 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends 4000401 4000401 4000401 4000401 4000401 4000571 4000571 Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 220V 50 Hz* 7 LValve Assembly T-Valve Assembly T-Valve Assembly T-Valve assembly with fittings used to connect two transfer	Black, set of 4	4000222
4000400 45° flare, swivel ends 6.0 ft. (1.8 m) Flexible Metal Hose, 1/2 in., 45° flare, swivel ends Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN₂ container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 220V 50 Hz* 5 pre-programmed numbers, 220V 50 Hz* 7 Love Assembly T-Valve Assembly T-Valve assembly with fittings used to connect two transfer	LN ₂ Transfer Hoses and Phase Separator	
4000401 Phase Separator, 1.3 in. (3.3 cm) diameter x 3.0 in. (7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 220V 50 Hz* T-Valve Assembly T-Valve assembly with fittings used to connect two transfer.		4000400
(7.6 cm) long x 1/4 in. FPT Low-Level Alarm Low-Level Alarm (120V) with Sensor for any standard-sized LN2 container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 220V 50 Hz* 1-Valve Assembly 1-Valve assembly with fittings used to connect two transfer	, ,	4000401
Low-Level Alarm (120V) with Sensor for any standard-sized LN ₂ container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 7 LValve Assembly T-Valve assembly with fittings used to connect two transfer	, , ,	4000571
LN ₂ container, includes dry contacts for remote alarm Sensaphone® Telephone Dialing Systems 4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 120V 60 Hz 7 LValve Assembly LValve assembly with fittings used to connect two transfer		
4 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 120V 60 Hz 4 pre-programmed numbers, 220V 50 Hz* 4 pre-programmed numbers, 220V 50 Hz* 4 400183 T-Valve Assembly T-Valve assembly with fittings used to connect two transfer.		8130
4 pre-programmed numbers, 220V 50 Hz* 8 pre-programmed numbers, 120V 60 Hz 8 pre-programmed numbers, 220V 50 Hz* 400183 T-Valve Assembly T-Valve assembly with fittings used to connect two transfer	Sensaphone® Telephone Dialing Systems	
8 pre-programmed numbers, 120V 60 Hz 400134 8 pre-programmed numbers, 220V 50 Hz* 400183 T-Valve Assembly T-Valve assembly with fittings used to connect two transfer	4 pre-programmed numbers, 120V 60 Hz	400047
8 pre-programmed numbers, 220V 50 Hz* 400183 T-Valve Assembly T-Valve assembly with fittings used to connect two transfer.	,	400182
T-Valve Assembly T-Valve assembly with fittings used to connect two transfer		400134
T-Valve accembly with fittings used to connect two transfer	8 pre-programmed numbers, 220V 50 Hz*	400183
T-Valve assembly with fittings, used to connect two transfer	T-Valve Assembly	
hoses to a supply tank		4000290

^{*}Not CE marked

wireless, tireless

with Thermo Scientific Smart-Vue wireless monitoring

Smart-Vue™ protects the quality of your samples 24/7 by continuously monitoring equipment conditions and will remotely notify you if conditions for sample integrity are compromised. In addition, Smart-Vue's data logging capabilities assist with compliance to FDA, GxP and other regulatory requirements.

- Wireless monitoring, alerting you remotely in the event of a power or mechanical failure
- Alert systems including real-time and visual alarms on the module
- Configurable data-logging, transmission cycles and upper/lower limits
- On-board single parameter module memory for up to 3,000 readings
- Automatic alarms for out-of-bounds conditions and technical problems
- Easy-to-read LCD display with the latest reading, alerts, signal strength and battery level
- Fully integrated with Smart-Vue client/server software suite
- 3.6V Lithium, replaceable battery (3,600 mA)
- Mounting kit with plastic holder, magnet, screws, cable ties, plastic cable holders and Velcro®
- Type: CE EN 300-220-1, FCC, EN12830, IC (Industry Canada), WPF (India), CMIT (China)

Ordering Information

Model No.	SV201-100-LSB
SV201-100-LSB	Package for 915 MHz regions*
SV201-101-LSB	Package for 868 MHz regions*
SV201-102-LSB	Package for 867 MHz regions*
SV201-103-LSB	Package for 434 MHz regions*

* Smart-Vue for cryogenic storage includes wireless radio module system, external three-wire PT100 temperature probe; Range: -200°C to +50°C, calibrated at -196°C, -80°C and 0°C. Package consists of module, external sensor, 3.6V lithium battery, mounting holder with Velcro, magnet and hardware, sensor mounting kit.





keep track of your samples

Thermo Scientific Matrix and Nunc 2D storage tubes

When your workflow includes semi-automated and fully-automated platforms for high throughput, Thermo Scientific™ tubes allow robust storage and tracking of sample volumes ranging from 70 µL to 12 mL in 384-, 96-, 48- and 24-place arrays. We have storage formats available for temperatures down to VPLN, and multiple sealing options including ScrewTop caps and septa seals. Solid, one-piece construction means there are no labels to fall off and medical grade, class VI resin tubes are supplied free of RNAse, DNAse, endotoxins and cytotoxins and SAL down to 10-6.

- 100% leak tested to ensure tube integrity and sample security
- Designed for automated systems including liquid handling, decappers and other automated platforms
- Rack base and tube design prevents the tube from spinning in the rack when decapping whether single tube hand decapping or, multi channel automated decapping
- Available in Latch Racks, specially-designed, stackable racks with a microplate footprint

Thermo Scientific Nunc CryoBank tubes

- Nunc CryoBank storage tubes are ideal for users who need locking tubes that are not going to fall out during frequent
 movement and use without a rack lid. Trust Nunc storage tubes for ultra low temperature storage down to the vapor
 phase of liquid nitrogen.
- Screw Cap with integrated gasket ensures a tight seal every time and compatible with storage across a range of temperatures.
- ScrewTop can be resealed numerous times with no effect on sealing integrity and can be stored down to the vapor phase of liquid nitrogen
- Laser-etched 2D barcode on the base of every tube ensures secure sample tracking with the highest contrast code available for reading, even with some frost on the tubes





thermoscientific.com/cold

©2015 Thermo Fisher Scientific Inc. All rights reserved. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Java is a registered trademark of Oracle. Sensaphone is a registered trademark of Phonetics, Inc. Teflon is a registered trademark of E.I. du Pont de Nemours and Company. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

Australia +61 39757 4300 Austria +43 1 801 40 0 Belgium +32 53 73 42 41 China +800 810 5118 or +400 650 5118 France +33 2 2803 2180

Germany national toll free 0800 1 536 376 Germany international +49 6184 90 6000 India toll free 1800 22 8374 India +91 22 6716 2200 Italy +39 02 95059 552 Japan +81 3 5826 1616 Netherlands +31 76 579 55 55 New Zealand +64 9 980 6700 Nordic/Baltic/CIS countries +358 9 3291 0200 Russia +7 812 703 42 15 Spain/Portugal +34 93 223 09 18 Switzerland +41 44 454 12 22 UK/Ireland +44 870 609 9203 USA/Canada +1 866 984 3766

Other Asian countries +852 2885 4613 **Countries not listed** +49 6184 90 6000



A Thermo Fisher Scientific Brand